

## PRE-WIRED CAP FOR EXACT8, 4XM8, 3 POLE



5.0m PUR/PVC 4X0.34+2x0,75

PUR/PVC

5.0 m

[Link to Product](#)

## Illustration

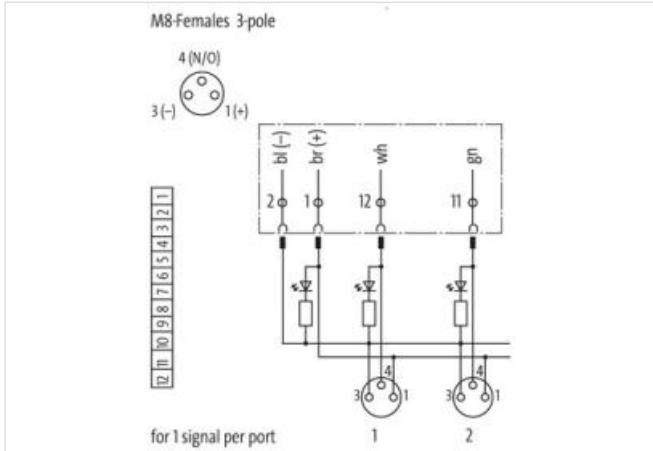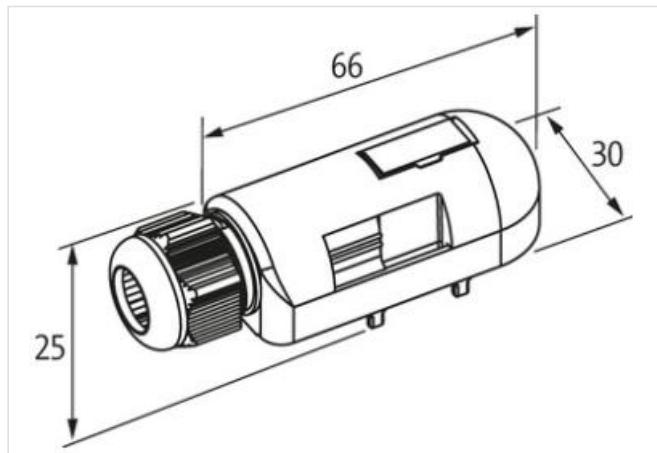

Product may differ from Image

## Form

Form 84049

## Technical Data

Housing Plastic, flame retardant

Total current max. 8 A

## General data

Temperature range -20...+80 °C, depending on cable quality

## Cables

No./diameter of wires 4x 0.34 + 2x 0.75 mm<sup>2</sup>

Wire isolation PVC (br, bl, ye, wh, gn, gr)

C-track properties 2 Mio.

Outer Ø 6.9 mm ±5%

Cable number	337
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	5x outer Ø
Bend radius (moving)	10x outer Ø
Material (jacket)	PUR/PVC

Product article number of manufacturer 8000-84049-3370500