



EXACT8, 4XM8, 4 POLE MOULDED CABLE

5.0m PUR 8x0,34+2x0,75, UL/CSA


5.0 m  
4-way, 4-pole  
Further cable lengths on request.  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

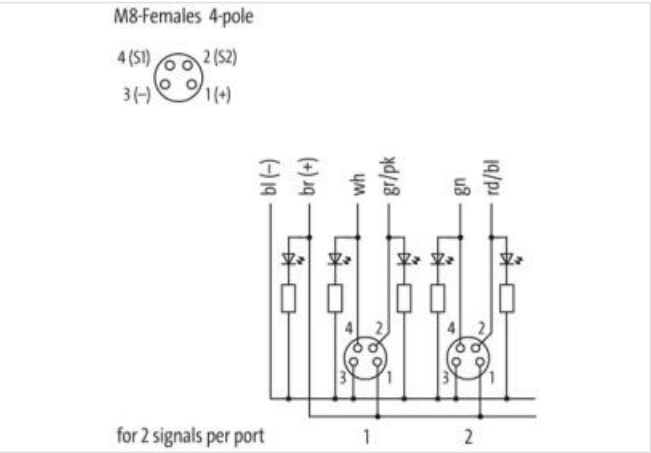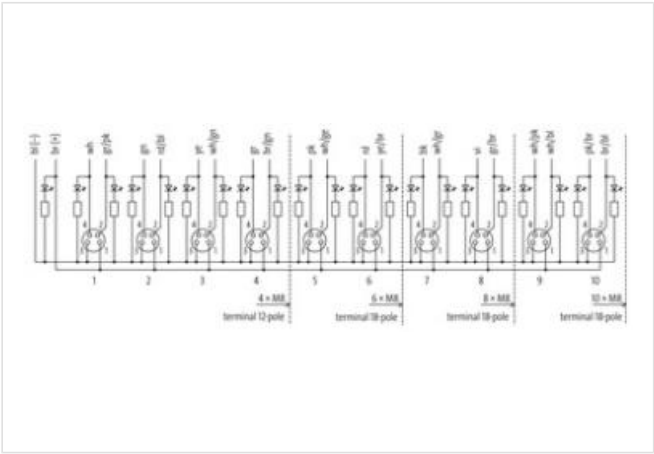

Product may differ from Image

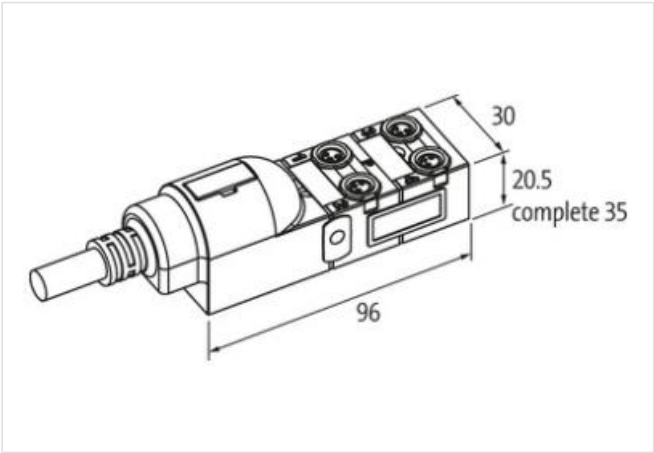

| Form                          |          |
|-------------------------------|----------|
| Form                          | 84110    |
| Technical Data                |          |
| Operating voltage             | 24 V DC  |
| Operating current per contact | max. 2 A |

|                  |                          |
|------------------|--------------------------|
| Locking of ports | Screw thread (M8×1 mm)   |
| Protection       | IP65/IP67                |
| Housing          | Plastic, flame retardant |
| Signal per port  | 2                        |
| Total current    | max. 8 A                 |

#### General data

|                   |                                          |
|-------------------|------------------------------------------|
| Temperature range | -20...+80 °C, depending on cable quality |
|-------------------|------------------------------------------|

#### Cables

|                            |                                                     |
|----------------------------|-----------------------------------------------------|
| No./diameter of wires      | 8× 0.34 + 2× 0.75 mm <sup>2</sup>                   |
| Wire isolation             | TPE (brgn, whgn, rdbl, grpk, gr, ye, gn, wh+br, bl) |
| C-track properties         | 5 Mio.                                              |
| Outer Ø                    | 9.2 mm ±5%                                          |
| Cable number               | 360                                                 |
| Color (jacket)             | gray                                                |
| Jacket Color               | gray                                                |
| Temperature range (fixed)  | -40...+80 °C                                        |
| Temperature range (mobile) | -5...+60 °C                                         |
| Bend radius (fixed)        | 5× outer Ø                                          |
| Bend radius (moving)       | 10× outer Ø                                         |
| Material (jacket)          | PUR (UL/CSA)                                        |

#### Contact Layout

|                                                                    |           |
|--------------------------------------------------------------------|-----------|
| PIN 1                                                              | (+)       |
| PIN 2                                                              | (NC)/(S2) |
| PIN 3                                                              | (-)       |
| PIN 4                                                              | (NO)/(S1) |
| LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2) |           |

|                                        |                    |
|----------------------------------------|--------------------|
| Product article number of manufacturer | 8000-84110-3600500 |
|----------------------------------------|--------------------|