

MVP12, 4XM12, UNIVERSAL

Universal distr.box, pins 1:1 to term.

4-way UNIVERSAL

Spring clamp plug-in terminals

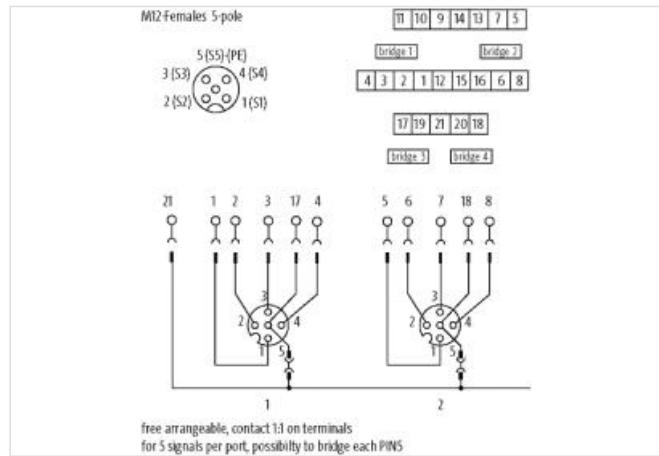
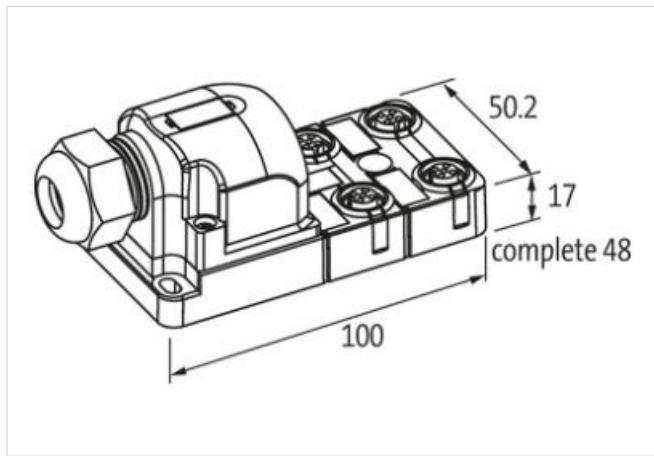
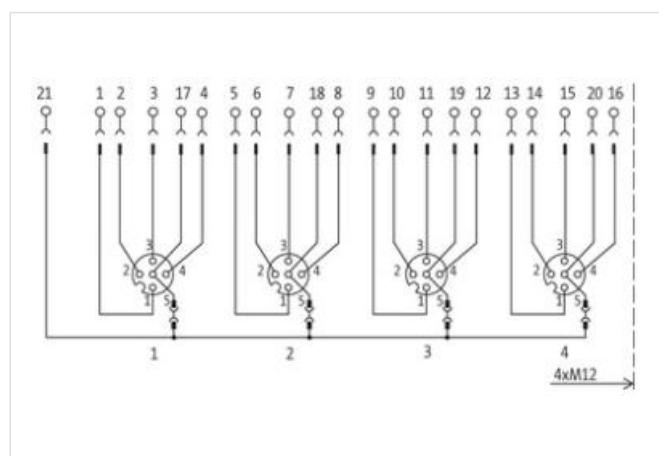
all 5 contacts of the M12 females separately carried on terminals

Replaces identical product (Art.No. 277303)

Separation contact 5 possible by removable plug links

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	max. 42 V AC/DC
Operating current per contact	max. 4 A
Connection	Spring clamp plug-in terminals: max. 1.5 mm ² (AWG 16)

Protection	IP65/IP67
Housing	Plastic, flame retardant
Total current	max. 8 A
General data	
Temperature range	-20...+80 °C
Product article number of manufacturer	8000-44742-0000000