

EXACT8, 4XM8, 4 POLE MOULDED CABLE

15.0m PUR/PVC 8x0,34+2x0,75

PUR/PVC

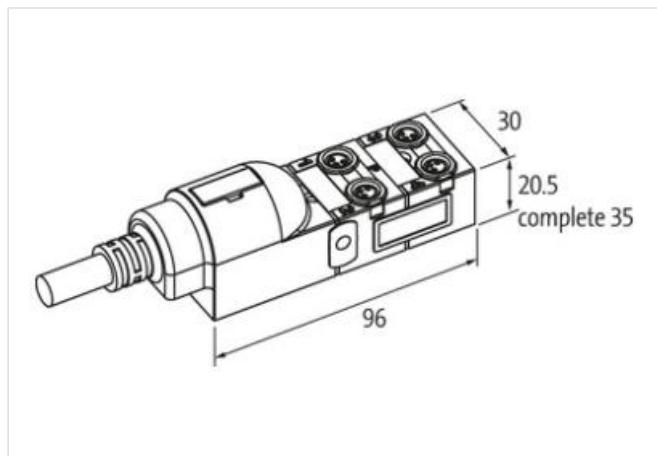
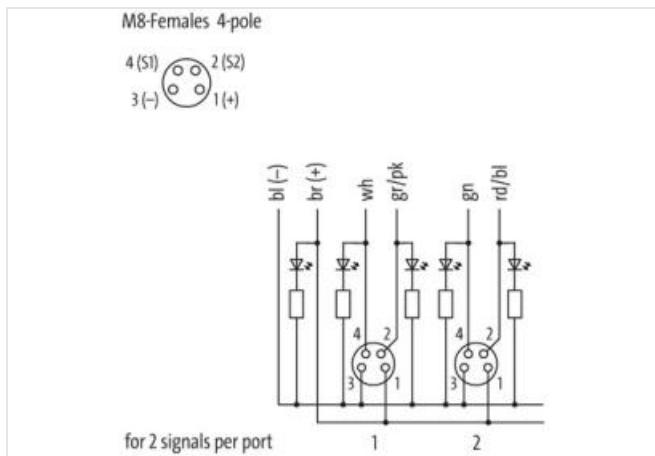
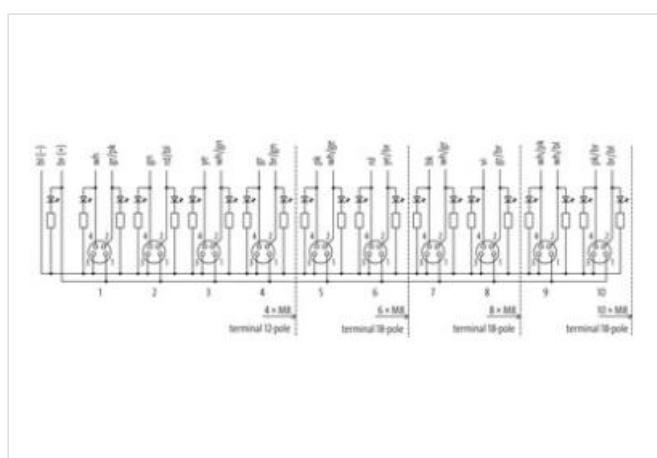
4-way, 4-pole

15.0 m

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[**Link to Product**](#)
Illustration


Product may differ from Image


Form

Form 84110

Technical Data

Operating voltage 24 V DC

Operating current per contact max. 2 A

Locking of ports	Screw thread (M8x1 mm)
Protection	IP65/IP67
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 8 A

General data

Temperature range	-20...+80 °C, depending on cable quality
-------------------	--

Cables

No./diameter of wires	8x 0.34 + 2x 0.75 mm ²
Wire isolation	PVC
C-track properties	1.5 Mio.
Outer Ø	8.6 mm ±5%
Cable number	358
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-30...+70 °C
Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	10x outer Ø
Bend radius (moving)	12x outer Ø
Material (jacket)	PUR/PVC

Contact Layout

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)	

Product article number of manufacturer 8000-84110-3581500