


MVP12, 4XM12, 4POLE, PLUG. CAP SCT.

Plug. cap, field-wireable via screw terminals


- 4-way, 4-pole
- Screw plug-in terminals
- Potential separation as option
- with LED for digital PNP-signals 24 V DC
- Plastic housings with good resistance against chemicals and oils.
- The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

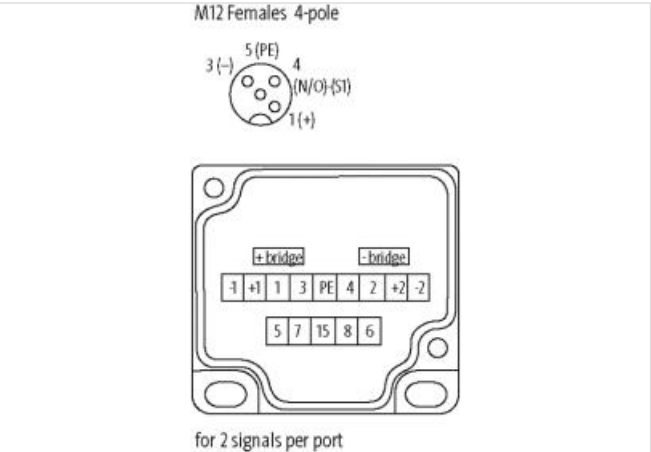

Product may differ from Image

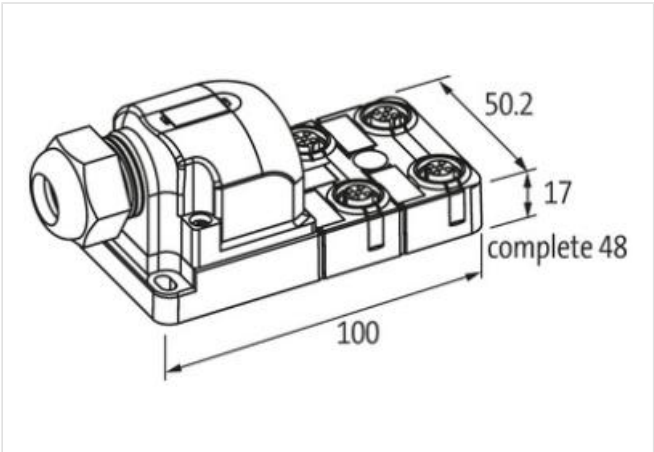

Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm)
Connection	Screw plug-in terminals: max. 1.5 mm² (AWG 16)

Protection	IP67 inserted and tightened (EN 60529)
------------	--

Housing	Plastic, flame retardant
---------	--------------------------

Signal per port	1 - (31-32)
-----------------	-------------

Total current	max. 2× 8 A
---------------	-------------

**General data**

Temperature range	-20...+80 °C
-------------------	--------------

Dimensions H×W×D	100×50.2×17 mm
------------------	----------------

Product article number of manufacturer	27776
--	-------