

**EXACT12, 8XM12, 4 POLE**

Conn.M12 12-pole

8-way

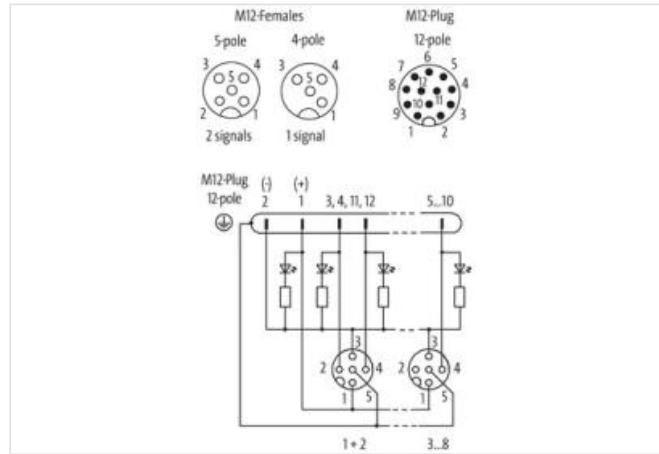
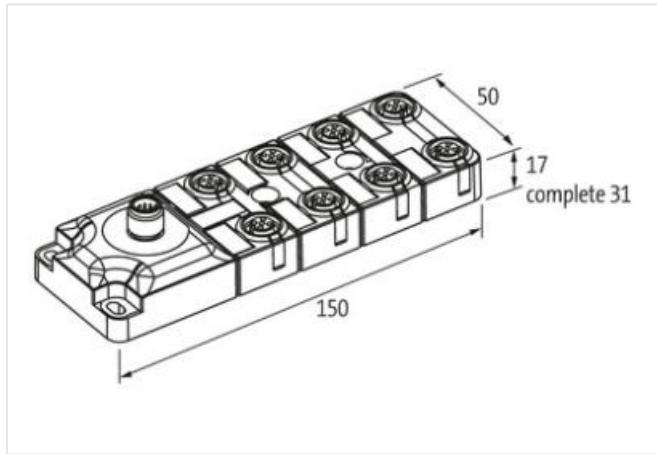
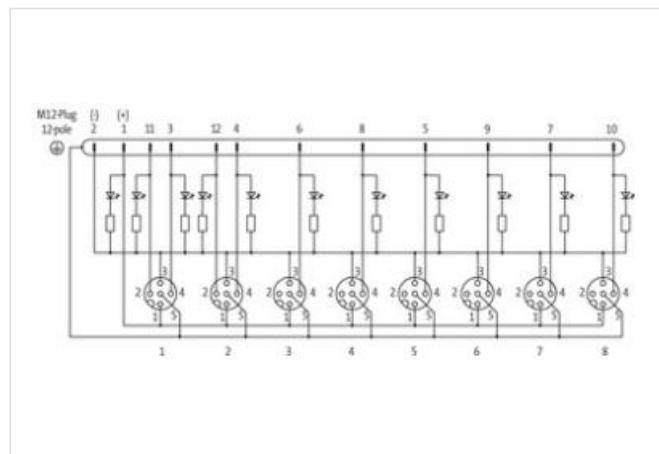
4-pole (port 3...8)

5-pole (port 1+2)

M12 plug connection, 12-pole

with LED for digital PNP-signals 24 V DC

Plastic housings with good resistance against chemicals and oils.

**Link to Product****Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	24 V DC
Operating current per contact	max. 1.5 A
Protection	IP65/IP67

The information in this brochure has been compiled with the utmost care.

Liability for the correctness, completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Housing	Plastic, flame retardant
Total current	max. 1.5 A
<b>General data</b>	
Temperature range	-20...+70 °C
<b>Contact Layout</b>	
PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)	

Product article number of manufacturer 8000-88460-0000000