


MVP12, 4XM12, 4POLE, PLUGGABLE CABLE

5.0m PUR/PVC 8x0,34+5x0,75, w/o LED's


- 4-way, 5-pole
- PUR/PVC
- 5.0 m
- Potential separation as option
- Further cable lengths on request.
- Plastic housings with good resistance against chemicals and oils.

Link to Product

Illustration

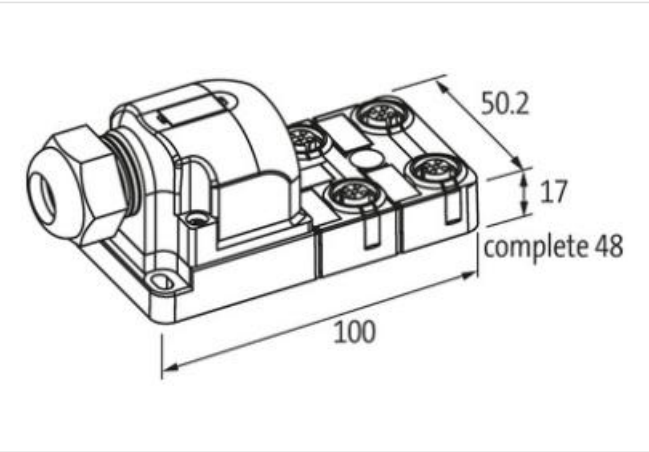

Product may differ from Image

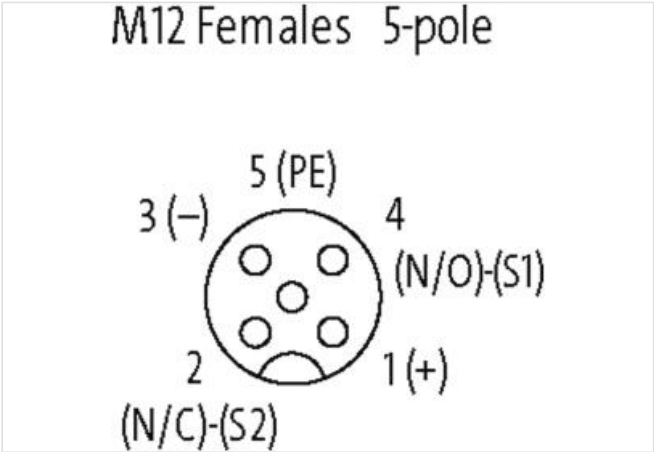

Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12x1 mm)

Protection	IP67 inserted and tightened (EN 60529)
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 2× 8 A

#### General data

Temperature range	-20...+80 °C
Dimensions H×W×D	99.2×50.2×17.2 mm

#### Cables

No./diameter of wires	8× 0.34 + 5× 0.75 mm <sup>2</sup>
Wire isolation	PVC
C-track properties	1.5 Mio.
Outer Ø	9.2 mm ±5%
Cable number	374
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-30...+80 °C
Bend radius (fixed)	10× outer Ø
Bend radius (moving)	12× outer Ø
Material (jacket)	PUR/PVC

#### Contact Layout

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)

Product article number of manufacturer	276597
--	--------