
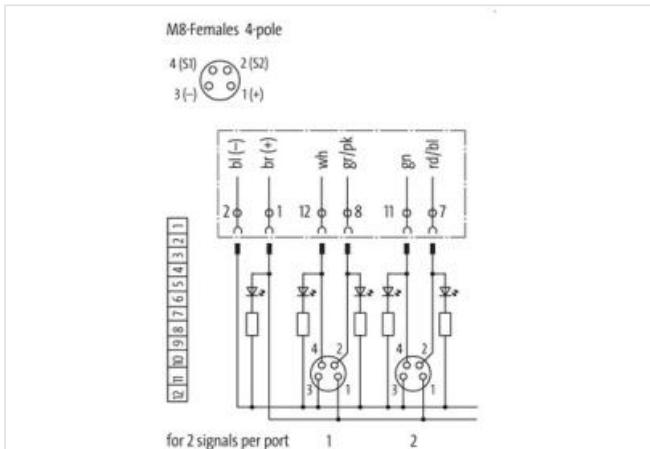


PRE-WIRED CAP FOR EXACT8, 4XM8, 4-POL

15.0m PUR/PVC 8x0,34+2x0,75

PUR/PVC
15.0 m[Link to Product](#)

Illustration

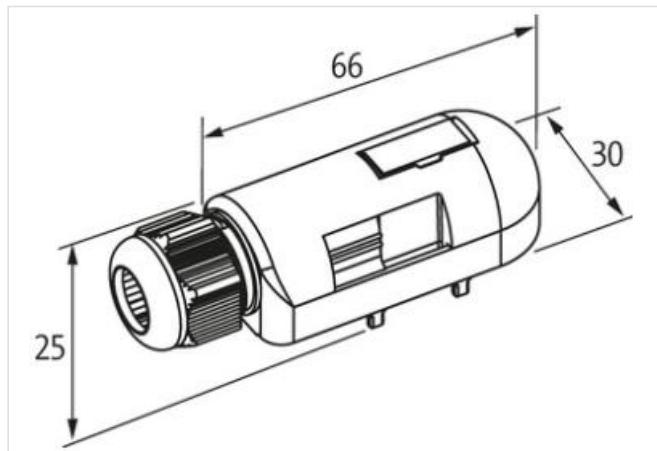

Product may differ from Image

Technical Data

Housing	Plastic, flame retardant
Total current	max. 8 A

General data

Temperature range	-20...+80 °C, depending on cable quality
-------------------	--

Cables

No./diameter of wires	8x 0.34 + 2x 0.75 mm ²
Wire isolation	PVC
C-track properties	1.5 Mio.
Outer Ø	8.6 mm ±5%
Cable number	358
Color (jacket)	gray
Jacket Color	gray

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Temperature range (fixed)	-30...+70 °C
Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	10x outer Ø
Bend radius (moving)	12x outer Ø
Material (jacket)	PUR/PVC

Product article number of manufacturer 8000-84149-3581500