



**EXACT12, 4XM12, 4 POLE CAP, PLUG. SCREW TERM.**

Self wireable, no LED


4-way, 4-pole  
without LED, up to 125 V AC/DC  
Screw plug-in terminals  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

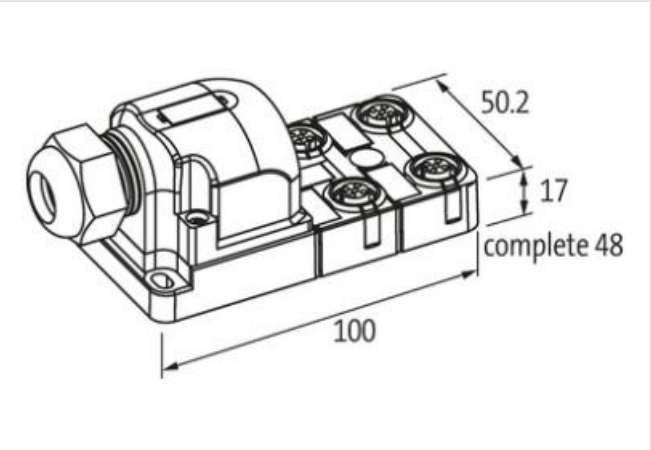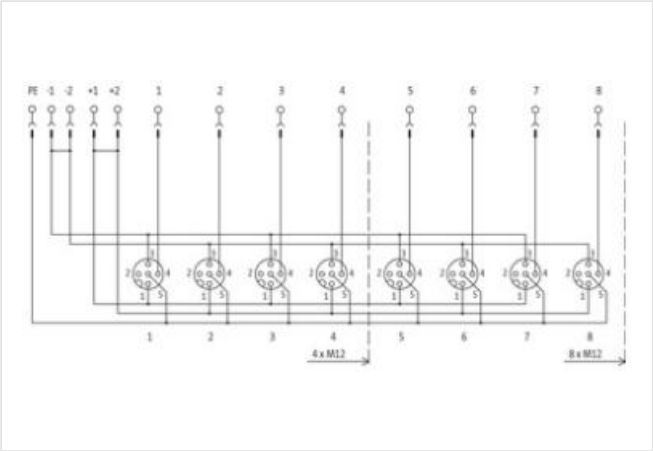

Product may differ from Image

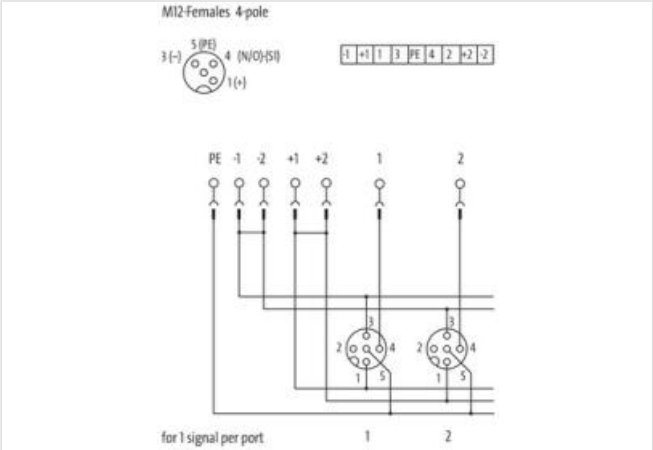

Technical Data	
Operating voltage	125 V AC/DC
Operating current per contact	max. 4 A
Connection	Screw plug-in terminals: max. 1.5 mm <sup>2</sup> (AWG 16)
Protection	IP65/IP67
Housing	Plastic, flame retardant
Total current	max. 8 A
General data	
Temperature range	-20...+70 °C

Contact Layout

PIN 1	(+)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
Product article number of manufacturer	8000-84452-0000000