

PASSIVE-DI0° PLASTIC,6XM12,5POL,PRE-WIRED CABLE

10.0m PUR-JB 12*0,34+3*0,75

6-way, 5-pole

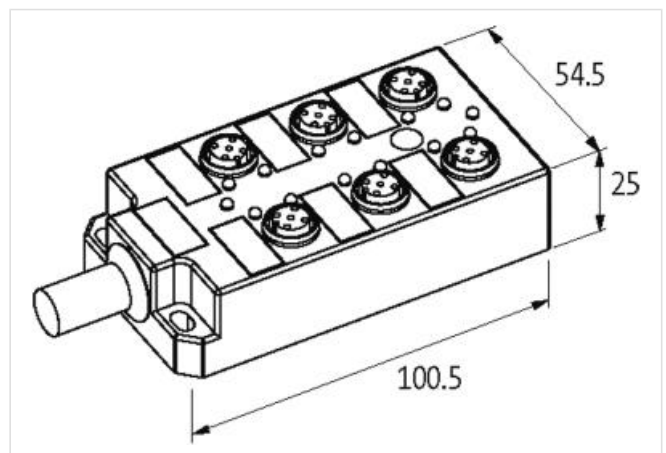
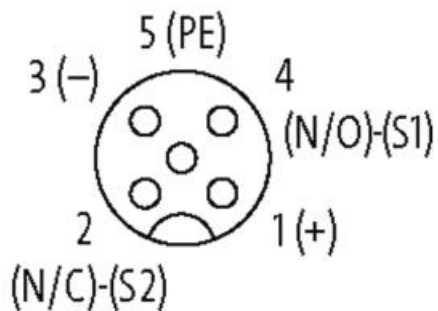
PUR/PVC

10.0 m

with LED for digital PNP-signals 24 V DC

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

[Link to Product](#)**Illustration****M12 Females 5-pole**

Product may differ from Image

Technical Data

Operating voltage	24 V DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm)
Signal per port	2
Total current	max. 10 A

General data

Temperature range	-20...+80 °C
-------------------	--------------

Protection	IP67 inserted and tightened (EN 60529)
------------	--

Dimensions H×W×D	100.5×54.5×25 mm
------------------	------------------

Cables

No./diameter of wires	12× 0.34 + 3× 0.75 mm ²
-----------------------	------------------------------------

Wire isolation	PVC (yebr, rd, grpk, wh, rdbl, gn, whgn, ye, brgn, gr, whye, pk, br, gnye, bl)
----------------	--

C-track properties	2 Mio.
--------------------	--------

Outer Ø	9.8 mm ±5%
---------	------------

Cable number	388
--------------	-----

Color (jacket)	gray
----------------	------

Jacket Color	gray
--------------	------

Temperature range (fixed)	-30...+80 °C
---------------------------	--------------

Temperature range (mobile)	-5...+70 °C
----------------------------	-------------

Bend radius (fixed)	10× outer Ø
---------------------	-------------

Bend radius (moving)	12× outer Ø
----------------------	-------------

Material (jacket)	PUR/PVC
-------------------	---------

Contact Layout

PIN 1	(+)
-------	-----

PIN 2	(NC)/(S2)
-------	-----------

PIN 3	(-)
-------	-----

PIN 4	(NO)/(S1)
-------	-----------

PIN 5	(Earth)
-------	---------

	LED (green): Power / LED (yellow): (S1/S2)
--	--

Product article number of manufacturer	27844
--	-------