



PRE-WIRED CAP FOR EXACT8, 10XM8, 3 POLE

15.0m PUR/PVC 10x0,34+2x0,75

PUR/PVC  
15.0 m

[Link to Product](#)

Illustration

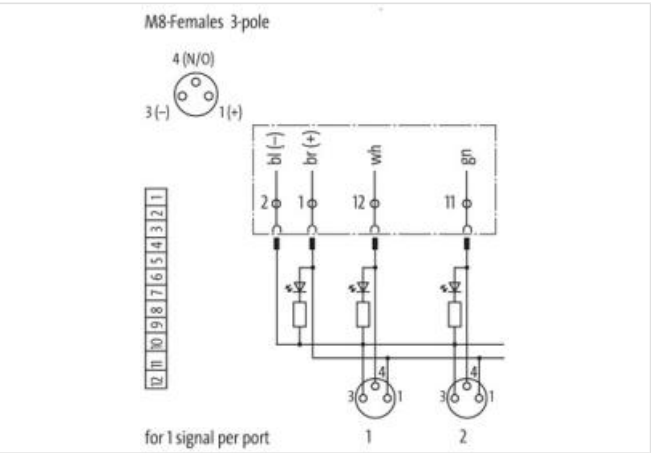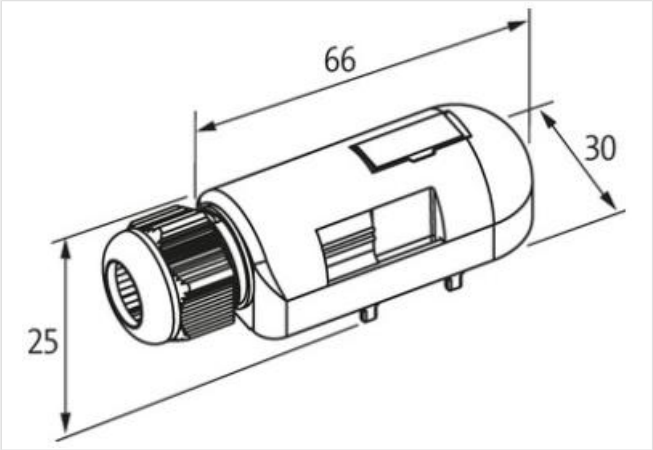

Product may differ from Image

Technical Data	
Housing	Plastic, flame retardant
Total current	max. 8 A
General data	
Temperature range	-20...+80 °C, depending on cable quality
Cables	
No./diameter of wires	10× 0.34 + 2× 0.75 mm²
Wire isolation	PVC (br, bl, wh, gn, pk, ye, bk, gr, rd, vi, grpk, rdbl)
C-track properties	2 Mio.
Outer Ø	8.3 mm ±5%
Cable number	385
Color (jacket)	gray
Jacket Color	gray

Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	5× outer Ø
Bend radius (moving)	10× outer Ø
Material (jacket)	PUR/PVC
Product article number of manufacturer	8000-80049-3851500