

EXACT12, 8XM12, 5-POLE, CAP, PLUG. SCREW TERM.

Self wireable, NPN-LED

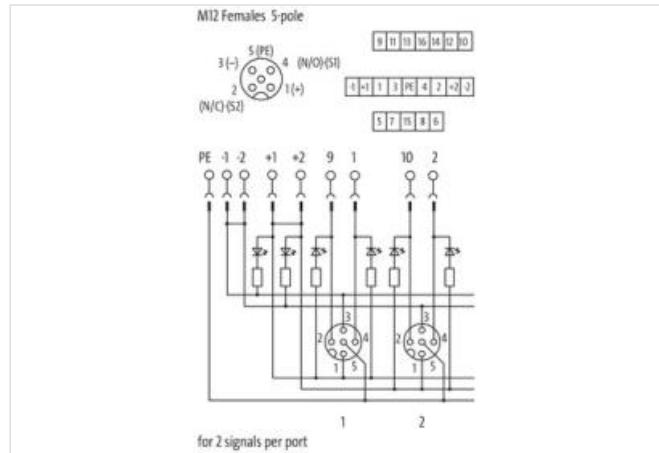
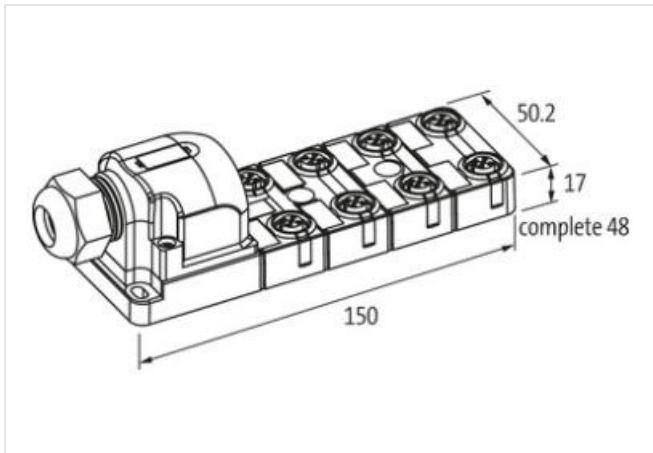
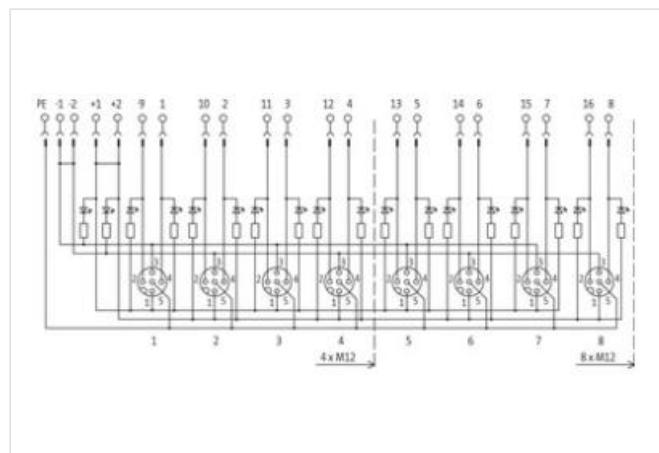
8-way, 5-pole

Form NPN

Screw plug-in terminals

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product**Illustration**

Product may differ from Image

**Technical Data**

| | |
|-------------------------------|--|
| Operating voltage | 24 V DC |
| Operating current per contact | max. 4 A |
| Connection | Screw plug-in terminals: max. 1.5 mm ² (AWG 16) |
| Protection | IP65/IP67 |

| | |
|---------|--------------------------|
| Housing | Plastic, flame retardant |
|---------|--------------------------|

| | |
|---------------|----------|
| Total current | max. 8 A |
|---------------|----------|

General data

| | |
|-------------------|--------------|
| Temperature range | -20...+70 °C |
|-------------------|--------------|

Contact Layout

| | |
|-------|-----|
| PIN 1 | (+) |
|-------|-----|

| | |
|-------|-----------|
| PIN 2 | (NC)/(S2) |
|-------|-----------|

| | |
|-------|-----|
| PIN 3 | (-) |
|-------|-----|

| | |
|-------|-----------|
| PIN 4 | (NO)/(S1) |
|-------|-----------|

| | |
|-------|---------|
| PIN 5 | (Earth) |
|-------|---------|

| |
|--|
| LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2) |
|--|

| | |
|--|--------------------|
| Product article number of manufacturer | 8000-88551-0000000 |
|--|--------------------|