

**MVP12, 4XM12, UNIVERSAL, SET**

Pins wired 1:1 to terminal

**4-way UNIVERSAL**

Screw plug-in terminals

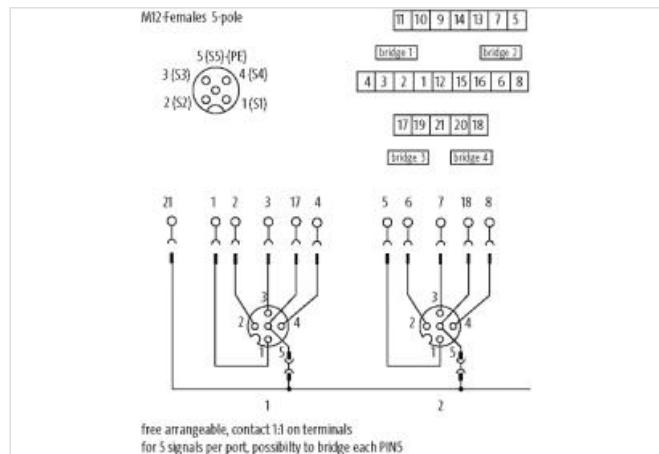
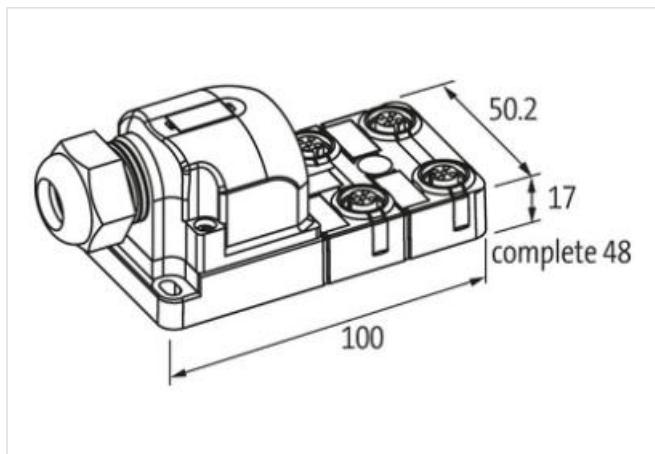
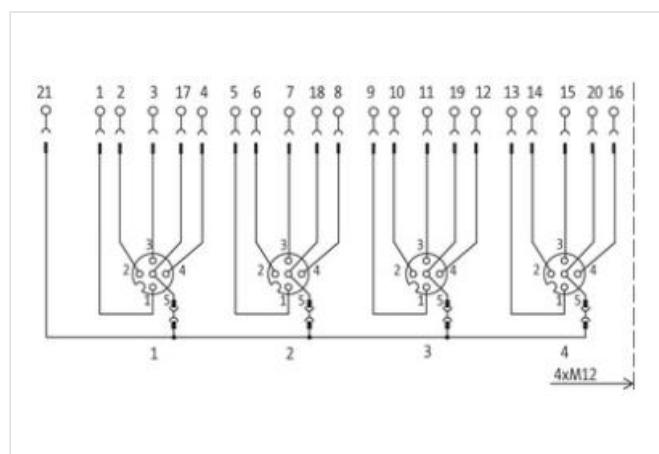
all 5 contacts of the M12 females separately carried on terminals

Replaces identical product (Art.No. 276625)

Separation contact 5 possible by removable plug links

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)
**Illustration**


Product may differ from Image


**Technical Data**

Operating voltage	max. 42 V AC/DC
Operating current per contact	max. 4 A

Connection	Screw plug-in terminals: max. 1.5 mm <sup>2</sup> (AWG 16)
Protection	IP65/IP67
Housing	Plastic, flame retardant
Total current	max. 8 A
<b>General data</b>	
Temperature range	-20...+80 °C
<b>Contact Layout</b>	
PIN 1	(S1)
PIN 2	(S2)
PIN 3	(S3)
PIN 4	(S4)
PIN 5	(S5)/(Earth)
Product article number of manufacturer	8000-44752-0000000