



**MVP12, 8XM12, 5POLE, PLUG. CAP SCT.**

Plug. cap, field-wireable via screw terminals


- 8-way, 5-pole
- Screw plug-in terminals
- Potential separation as option
- with LED for digital PNP-signals 24 V DC
- Plastic housings with good resistance against chemicals and oils.
- The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

**Illustration**

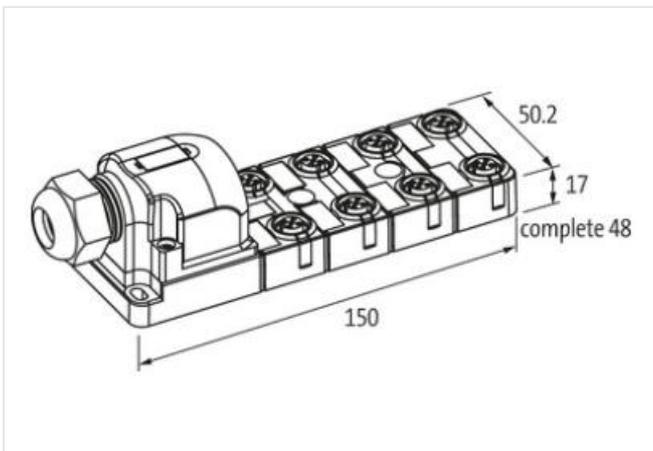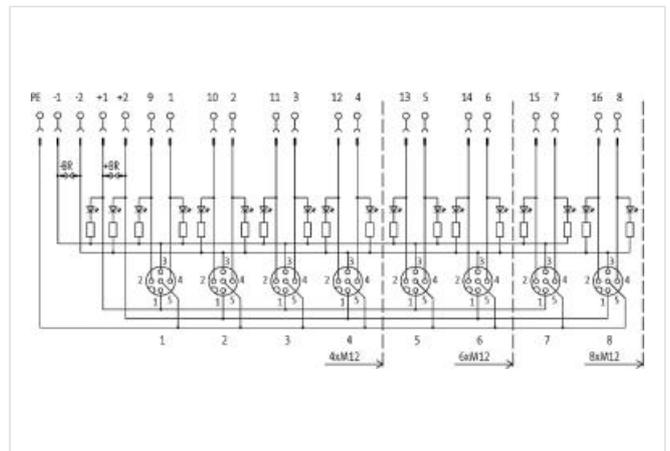

Product may differ from Image

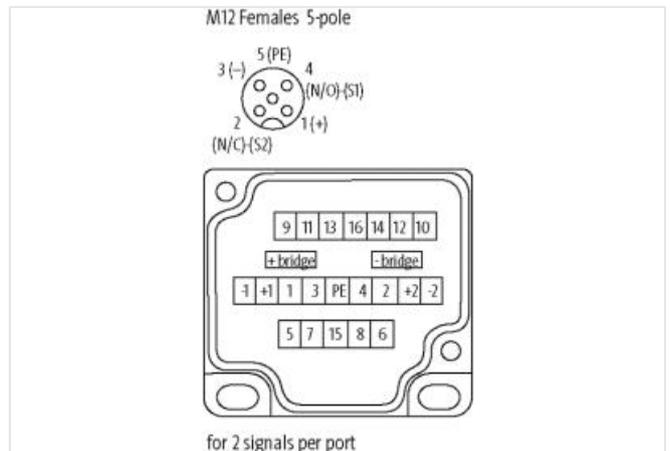

Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12x1 mm)

Connection	Screw plug-in terminals: max. 1.5 mm <sup>2</sup> (AWG 16)
Protection	IP67 inserted and tightened (EN 60529)
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 2× 8 A

**General data**

Temperature range	-20...+80 °C
Dimensions H×W×D	150×50.2×17 mm

**Contact Layout**

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
	LED (green): Power / LED (yellow): (S1/S2)

Product article number of manufacturer	27775
--	-------