

**MVP-METALL, 4XM12, 5POLE, M23 19POL. CON.**

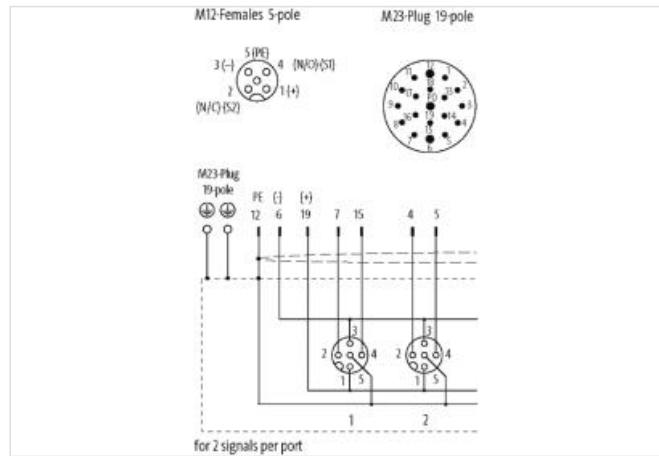
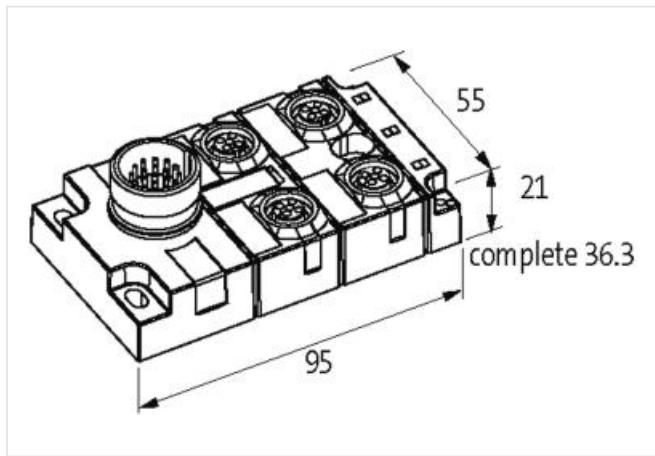
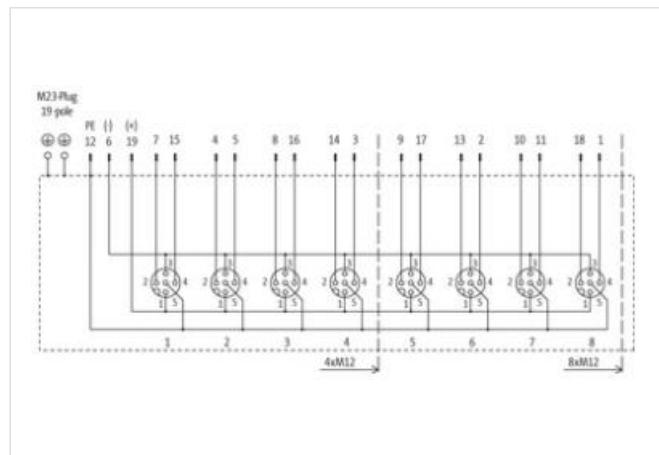
Connector exit frontside

4-way, 5-pole

M23 plug connection, 19-pole

without LED for analog signals up to 125 V AC/DC

Replaces identical product (Art.No. 27531)

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage max. 125 V AC/DC

Operating current per contact max. 4 A

Protection IP65, IP67, IP68

Housing Zinc die casting, matte nickel plated

Total current max. 7.5 A

The information in this brochure has been compiled with the utmost care.

Liability for the correctness, completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

**General data**

Temperature range -25...+80 °C

**Contact Layout**

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)

Product article number of manufacturer 8000-54522-0000000