



MVP12, 6XM12, 5POLE, PLUGGABLE CABLE

10.0m PUR/PVC 12x0,34+3x0,75

6-way, 5-pole
Further cable lengths on request.
PUR/PVC
Plastic housings with good resistance against chemicals and oils.
10.0 m
The resistance to aggressive media should be individually tested for your application. Further details on request.
with LED for digital PNP-signals 24 V DC

Link to Product

Illustration

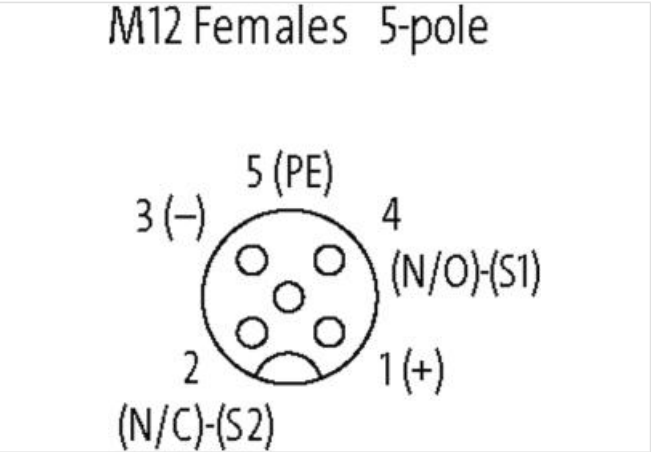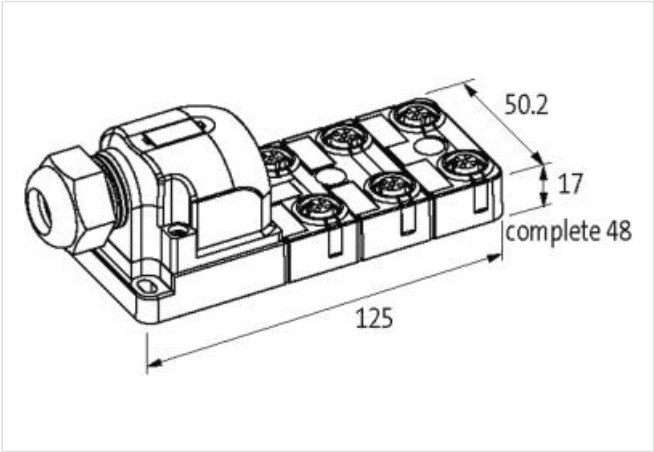

Product may differ from Image



UL
UL

Technical Data	
Operating voltage	24 V DC \pm 25%
Operating current per contact	max. 4 A
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)

Material	PBT
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 8 A

General data

Temperature range	-20...+80 °C
Dimensions H×W×D	125×50.2×17 mm

Cables

No./diameter of wires	12× 0.34 + 3× 0.75 mm ²
Wire isolation	PVC (yebr, rd, grpk, wh, rdbl, gn, whgn, ye, brgn, gr, whye, pk, br, gnye, bl)
C-track properties	2 Mio.
Outer Ø	9.8 mm ±5%
Cable number	388
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+70 °C
Bend radius (fixed)	10× outer Ø
Bend radius (moving)	12× outer Ø
Material (jacket)	PUR/PVC

Product article number of manufacturer	27033
--	-------