



MVP12, 6XM12, 5POLE, PLUGGABLE CABLE

5.0m PUR/PVC 12x0,34+5x0,75

6-way, 5-pole
Further cable lengths on request.
PUR/PVC
Plastic housings with good resistance against chemicals and oils.
5.0 m
The resistance to aggressive media should be individually tested for your application. Further details on request.
potentially separated
with LED for digital PNP-signals 24 V DC

Link to Product

Illustration

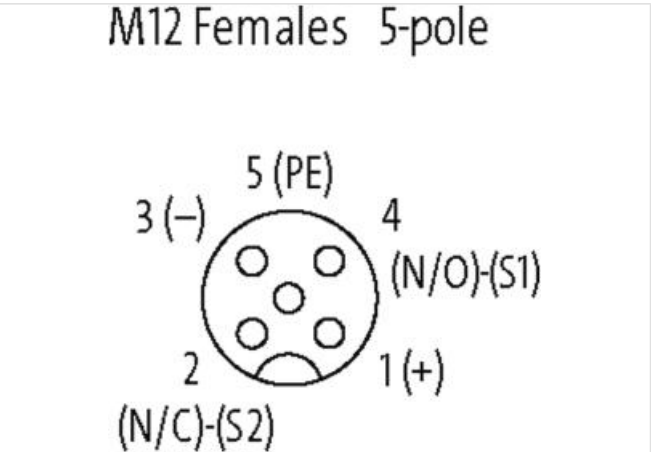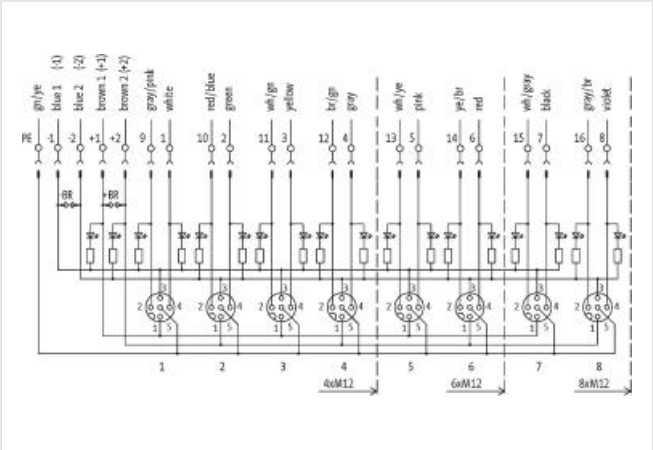

Product may differ from Image



Technical Data	
Operating voltage	24 V DC ±25%
Operating current per contact	max. 4 A

Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Material	PBT
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 2× 8 A
General data	
Temperature range	-20...+80 °C
Dimensions H×W×D	125×50.2×17 mm
Product article number of manufacturer	27076