



PRE-WIRED CAP FOR EXACT8, 4XM8, 3 POLE

15.0m PUR 4X0.34+2x0,75, UL/CSA

15.0 m

[Link to Product](#)

Illustration

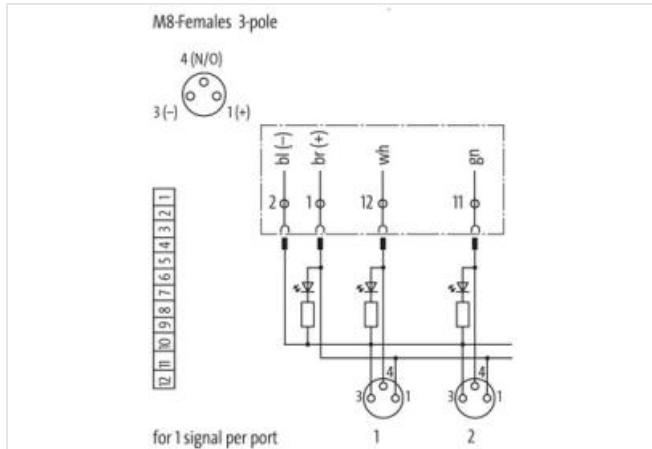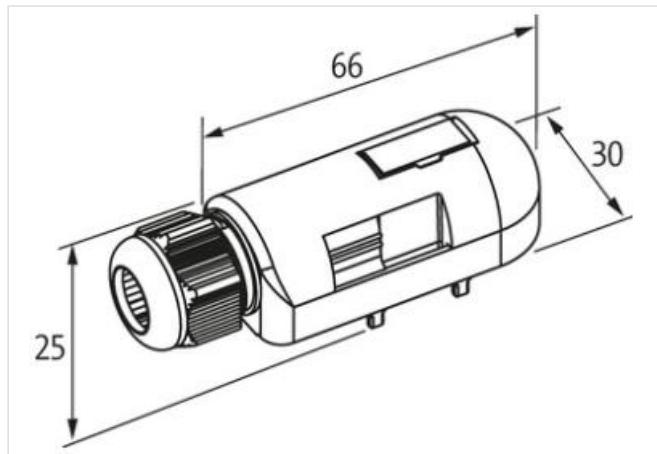

Product may differ from Image

Form

Form 84049

Technical Data

Housing Plastic, flame retardant

Total current max. 8 A

General data

Temperature range -20...+80 °C, depending on cable quality

Cables

No./diameter of wires 4x 0.34 + 2x 0.75 mm²

Wire isolation TPE-E

C-track properties 5 Mio.

Outer Ø 7.6 mm ±5%

Cable number 334

Approval (cable)	UL (AWM-Style 20233), CSA
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	5x outer Ø
Bend radius (moving)	10x outer Ø
Material (jacket)	PUR (UL/CSA)

Product article number of manufacturer 8000-84049-3341500