



EXACT12, 4XM12, 5-POLE, BASIC HOUSING

Without homerun-cable


4-way, 5-pole
Form PNP
Screw plug-in terminals
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

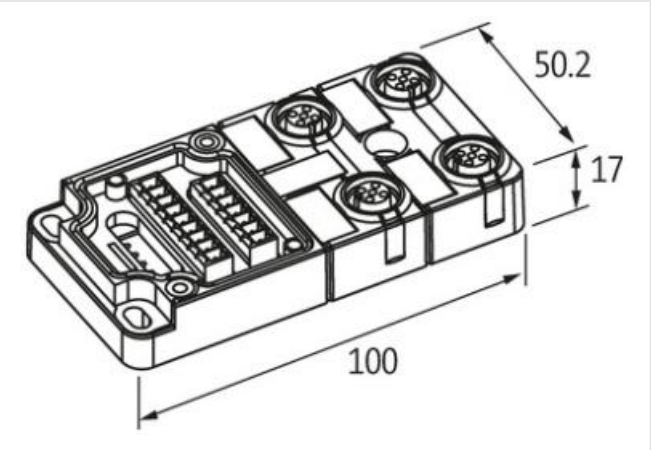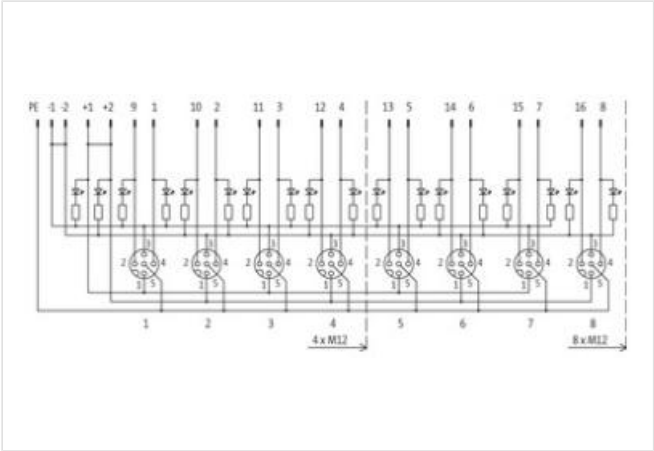

Product may differ from Image

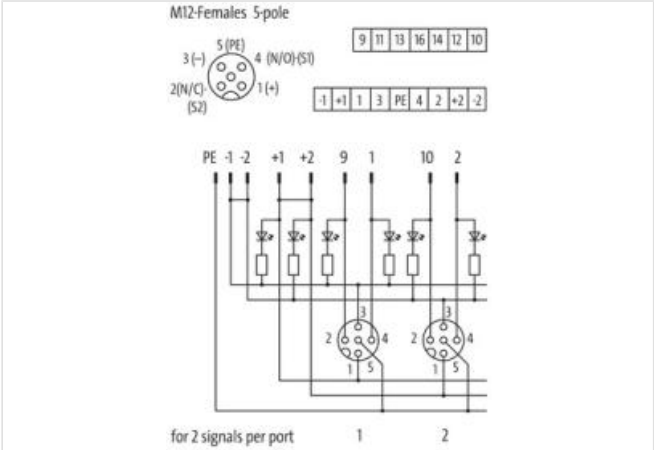

Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 4 A
Protection	IP65/IP67
Housing	Plastic, flame retardant

Total current max. 8 A

General data

Temperature range -20...+70 °C

Contact Layout

PIN 1 (+)

PIN 2 (NC)/(S2)

PIN 3 (-)

PIN 4 (NO)/(S1)

PIN 5 (Earth)

LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)

Product article number of manufacturer 8000-84500-0000000