



EXACT12, 4XM12, 5-POLE, PLUG. CAP

Spring terminals, field-wireable


- 4-way, 5-pole
- Form PNP
- Spring clamp plug-in terminals
- Plastic housings with good resistance against chemicals and oils.
- The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

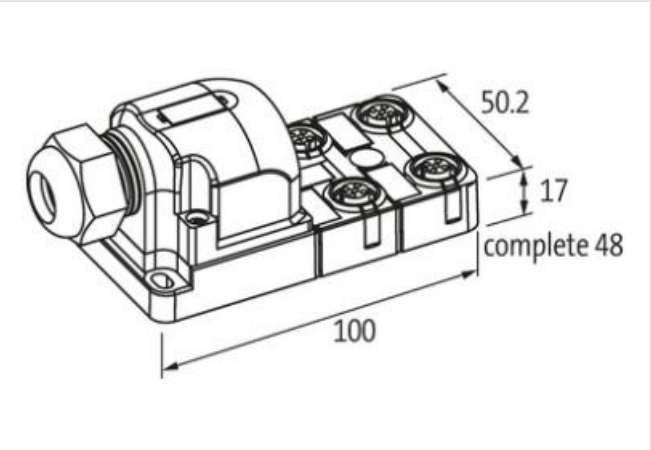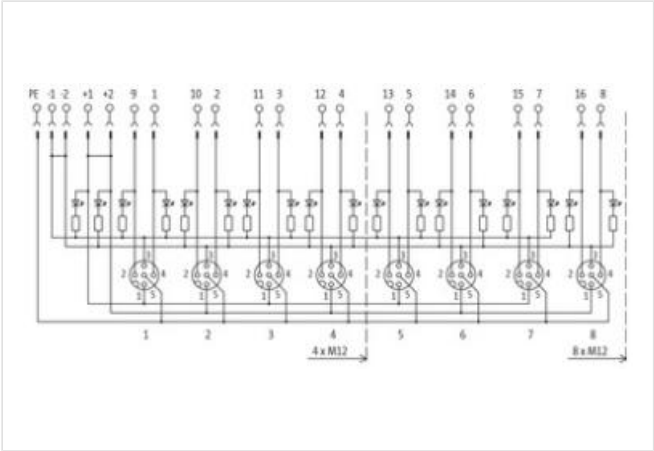

Product may differ from Image

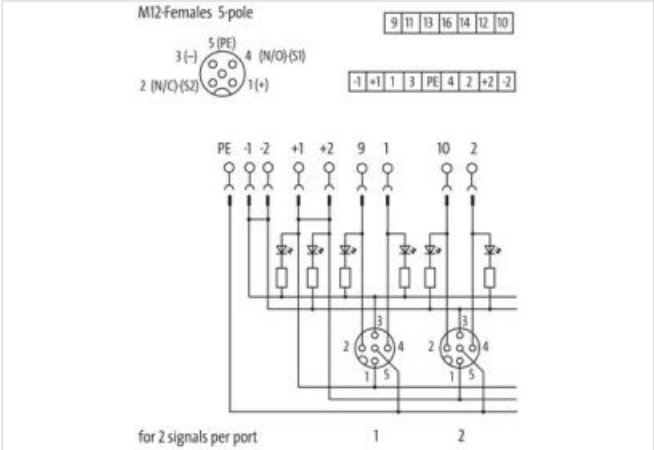

Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 4 A
Connection	Spring clamp plug-in terminals: max. 1.5 mm² (AWG 16)
Protection	IP65/IP67

Housing	Plastic, flame retardant
---------	--------------------------

Total current	max. 8 A
---------------	----------

**General data**

Temperature range	-20...+70 °C
-------------------	--------------

**Contact Layout**

PIN 1	(+)
-------	-----

PIN 2	(NC)/(S2)
-------	-----------

PIN 3	(-)
-------	-----

PIN 4	(NO)/(S1)
-------	-----------

PIN 5	(Earth)
-------	---------

	LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)
--	--

Product article number of manufacturer	8000-84540-0000000
--	--------------------