

## **EXACT12 SAFETY, FIX. CABLE, P1-4 M12 5POLE LED,**

P5-8 M12 4/3-pol 1:1 no LED, 15m PUR/PVC

PUR/PVC 8-way, 5-pole 15.0 m

Homerun cable with spring clamp terminals

4-/3-pole

Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


## **Link to Product**

## Illustration



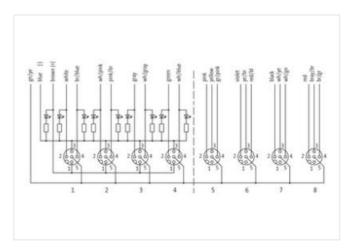



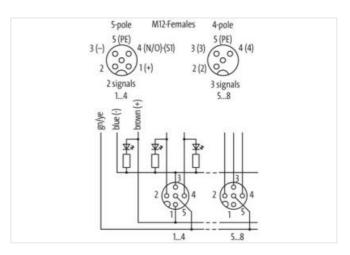

Product may differ from Image



Technical Data		
Operating voltage	24 V DC	
Operating current per contact	max. 4 A	



Locking of ports	Screw thread (M12×1 mm)	
Protection	IP65/IP67	
Housing	Plastic, flame retardant	
General data		
Temperature range	-20+60 °C, depending on cable quality	
Cables		
No./diameter of wires	20× 0.34 + 3× 0.75 mm²	
Wire isolation	PVC	
C-track properties	2 Mio.	
Outer Ø	10.0 mm ±5%	
Cable number	407	
Jacket Color	gray	
Temperature range (fixed)	-30+80 °C	
Temperature range (mobile)	-5+60 °C	
Bend radius (fixed)	10× outer Ø	
Bend radius (moving)	12× outer Ø	
Material (jacket)	PUR/PVC (UL/CSA)	
Contact Layout		
PIN 1	(+) port 14	
PIN 2	(NC)/(S2) port 14; (S1) port 58	
PIN 3	(-) port 14; (S2) port 58	
PIN 4	(NO)/(S1) port 14; (S3) port 58	
PIN 5	(Earth)	
	LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2) port 14	
Product article number of manufacturer	8000-98710-4071500	