


## EXACT12, 4XM12, 4 POLE


Conn.M12 8pole


4-way 4-pole (port 3+4) 5-pole (port 1+2) M12 plug connection, 8-pole with LED for digital PNP-signals 24 V DC Plastic housings with good resistance against chemicals and oils.

## Link to Product



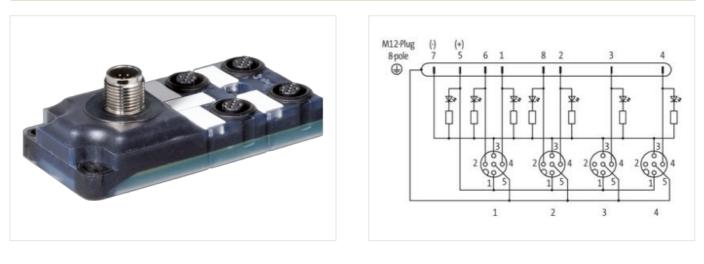



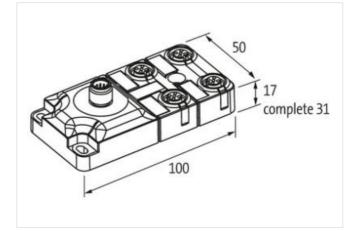

Product may differ from Image



Technical Data		
Operating voltage	24 V DC	
Operating current per contact	max. 2 A	
Protection	IP65/IP67	

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com



Housing	Plastic, flame retardant
Total current	max. 2 A
General data	
Temperature range	-20+70 °C
Contact Layout	
PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
	LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)

Product article number of manufacturer

8000-84470-0000000

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com