


MVP-METALL, 4XM12, 5POLE, PRE-WIRED CABLE

15.0m PUR 8x0,34+3X0.75, UL/CSA


15.0 m  
4-way, 5-pole  
Replaces identical product (Art.No. 27489)  
shielded  
without LED, 5-pole (for analog signals)  
Further cable lengths on request.

Link to Product

Illustration

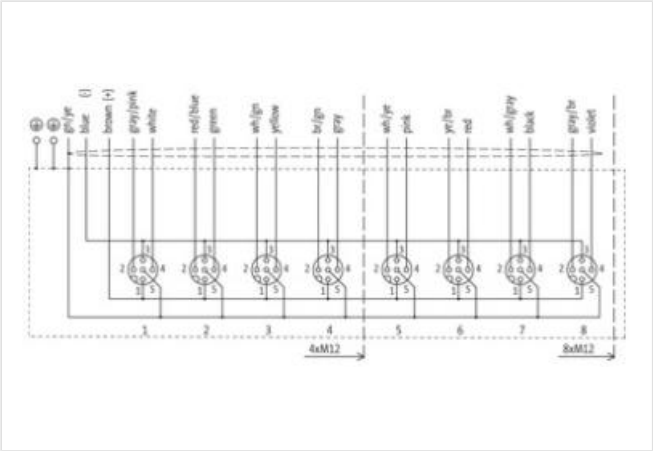

Product may differ from Image

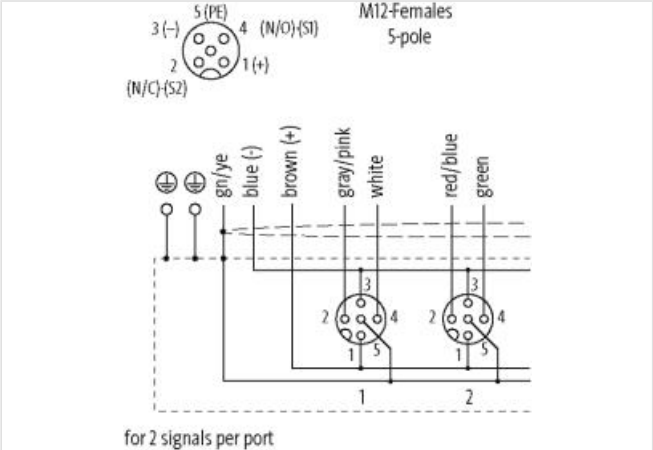

Technical Data	
Operating voltage	max. 125 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm)
Protection	IP65, IP67, IP68

Housing Zinc die casting, matte nickel plated

#### General data

Temperature range -20...+90 °C, depending on cable quality

#### Cables

No./diameter of wires 8× 0.34 + 3× 0.75 mm<sup>2</sup>

Wire isolation TPE (grpk, wh, rdbl, gn, whgn, ye, brgn, gr, br, bl, gnye)

C-track properties 5 Mio.

Outer Ø 9.3 mm ±5%

Cable number 373

Shield yes

Color (jacket) gray

Jacket Color gray

Temperature range (fixed) -40...+90 °C

Temperature range (mobile) -40...+90 °C

Bend radius (fixed) 10× outer Ø

Bend radius (moving) 12× outer Ø

Material (jacket) PUR (UL/CSA)

#### Contact Layout

PIN 1 (+)

PIN 2 (NC)/(S2)

PIN 3 (-)

PIN 4 (NO)/(S1)

PIN 5 (Earth)

Product article number of manufacturer 8000-54515-3731500