




**EXACT12, 8XM12, 5 POL.**

Pot. sep., backside plug. spring terminals

5-pole, potentially separated  
pluggable rear connection  
Spring clamp plug-in terminals  
with LED for digital PNP-signals 24 V DC  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.  
flat gasket included

[Link to Product](#)

Illustration

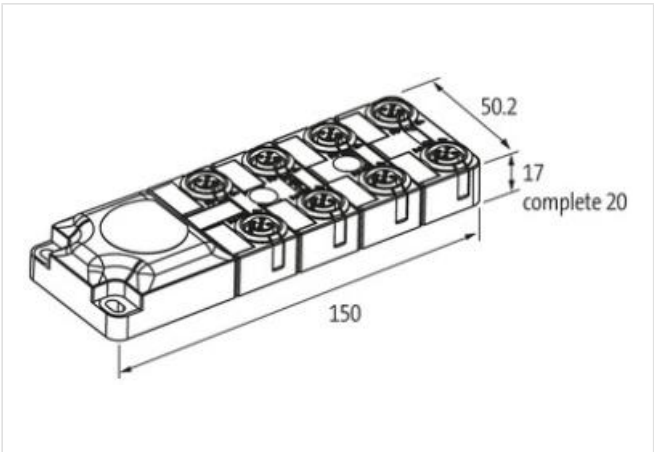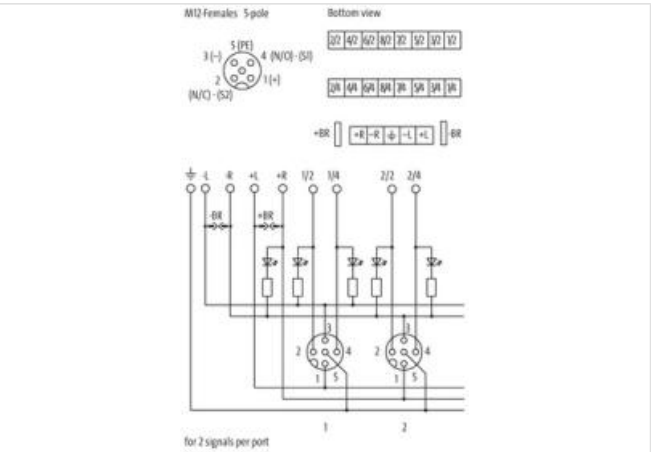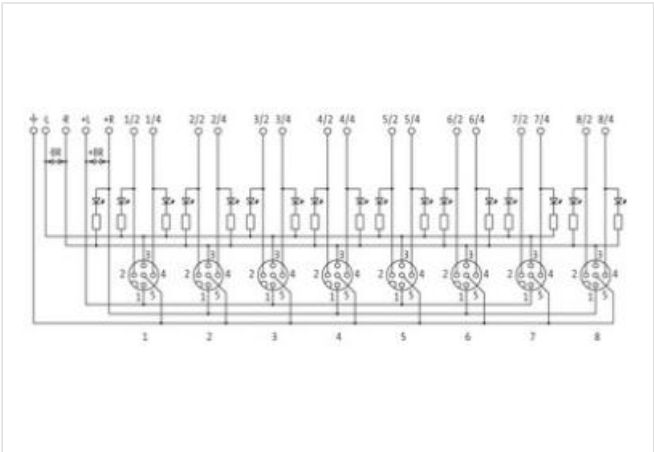

Product may differ from Image



Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 4 A

Protection	IP65/IP67
Housing	Plastic, flame retardant
Total current	max. 2× 8 A

**General data**

Temperature range	-20...+70 °C
-------------------	--------------

**Contact Layout**

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)	

Product article number of manufacturer	8000-88690-0000000
--	--------------------