

CAP. WITH SCREW PLUG TERMINALS 21 POLE

Use with MVP12 / Exact12 UNIVERSAL

Cap for 4-way distribution box, UNIVERSAL, 5-pole


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration



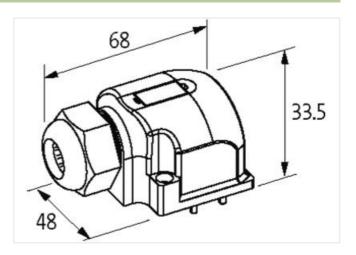



Product may differ from Image



Technical Data	
Connection	Screw plug-in terminals: max. 1.5 mm² (AWG 16)
Housing	Plastic, flame retardant
Total current	max. 8 A
General data	
Temperature range	-20+80 °C, depending on cable quality
Product article number of manufacturer	8000-84759-0000000

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Data Sheet for Article 8000-84759-0000000

