

**MVP12, 4XM12, 5POLE, PLUGGABLE CABLE**

3.0m PUR/PVC 8x0,34+5x0,75

4-way, 5-pole

Further cable lengths on request.

PUR/PVC

Plastic housings with good resistance against chemicals and oils.

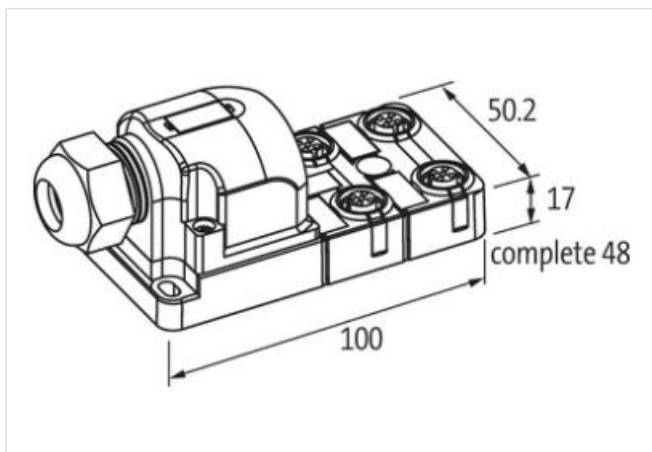
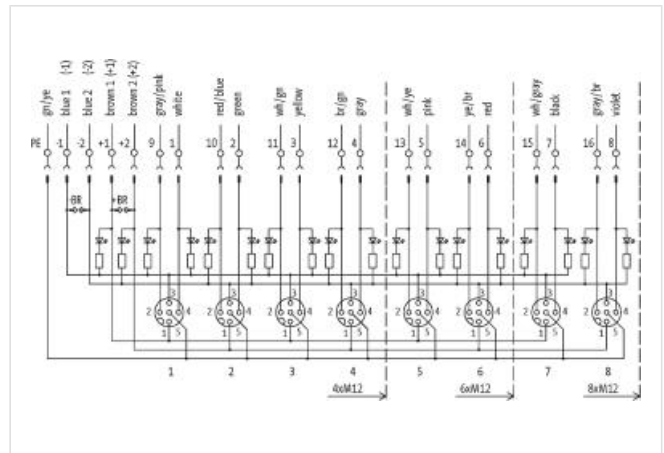
3.0 m

The resistance to aggressive media should be individually tested for your application. Further details on request.

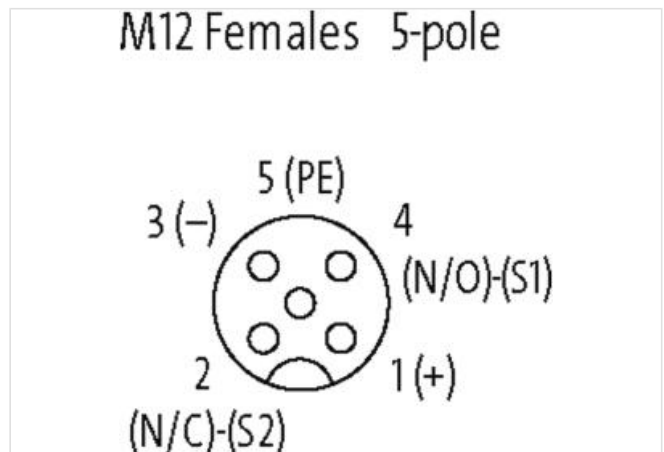
potentially separated

with LED for digital PNP-signals 24 V DC

Further cable lengths on request.

[Link to Product](#)**Illustration**

Product may differ from Image



UL

UL

**Technical Data**

Operating voltage

24 V DC  $\pm 25\%$ 

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Operating current per contact	max. 4 A
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Material	PBT
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 2× 8 A

#### General data

Temperature range	-20...+80 °C
Dimensions H×W×D	100×50.2×17 mm

#### Cables

No./diameter of wires	8× 0.34 + 5× 0.75 mm <sup>2</sup>
Wire isolation	PVC
C-track properties	1.5 Mio.
Outer Ø	9.2 mm ±5%
Cable number	374
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-30...+80 °C
Bend radius (fixed)	10× outer Ø
Bend radius (moving)	12× outer Ø
Material (jacket)	PUR/PVC

#### Contact Layout

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
LED (green): Power / LED (yellow): (S1/S2)	

Product article number of manufacturer	27071
--	-------