

CAP FOR D-BOX M12 8-WAY 5-POLE

Pot.-sep. 25m PUR/PVC, 16x0,34+5X0.75

for 8-way distribution boxes, 5-pole
potentially separated


Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.



The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

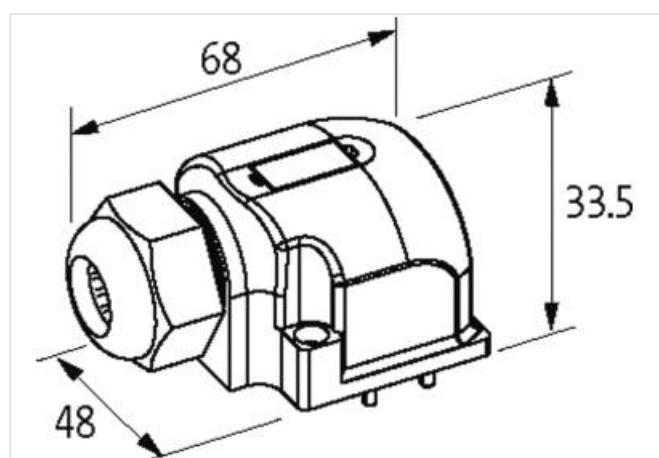

M12-Females 5-pole

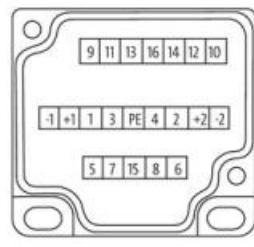

for 2 signals per port

Product may differ from Image

Form

Form 88659

Technical Data

Housing Plastic, flame retardant

Total current max. 8 A

General data

Temperature range -20...+80 °C, depending on cable quality

Cables

No./diameter of wires 16x 0.34 + 5x 0.75 mm²

The information in this brochure has been compiled with the utmost care.

Liability for the correctness, completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Wire isolation	PVC
C-track properties	1.5 Mio.
Outer Ø	12.5 mm ±5%
Cable number	404
Material (wire)	Cu wire, bare
Resistor (core)	max. 57 Ω/km (0.34 mm ²), max. 26 Ω/km (0.75 mm ²); (20 °C)
Jacket Color	gray
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-30...+80 °C
Bend radius (fixed)	10x outer Ø
Bend radius (moving)	12x outer Ø
Material (jacket)	PUR/PVC

Product article number of manufacturer 8000-88659-4042500