

**EXACT12, 4XM12, 5-POLE, CON. M23 19 POLE**

Without con. cable

4-way, 5-pole

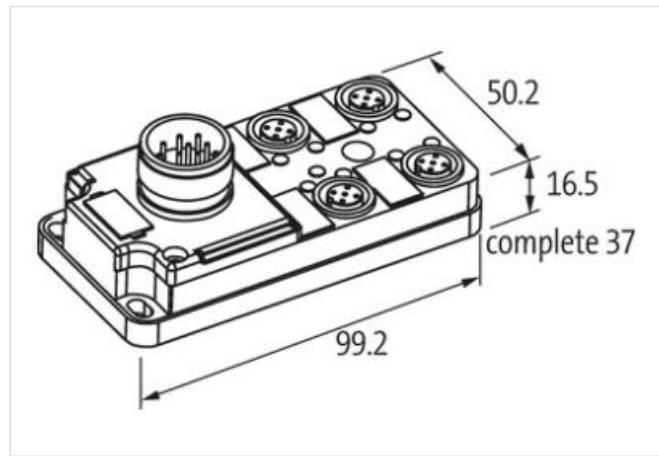
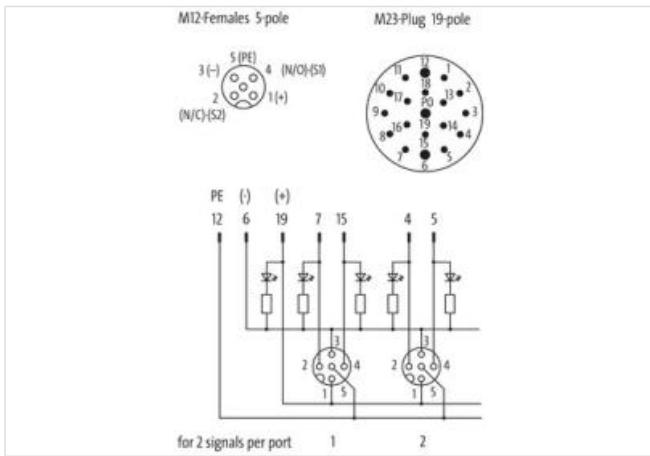
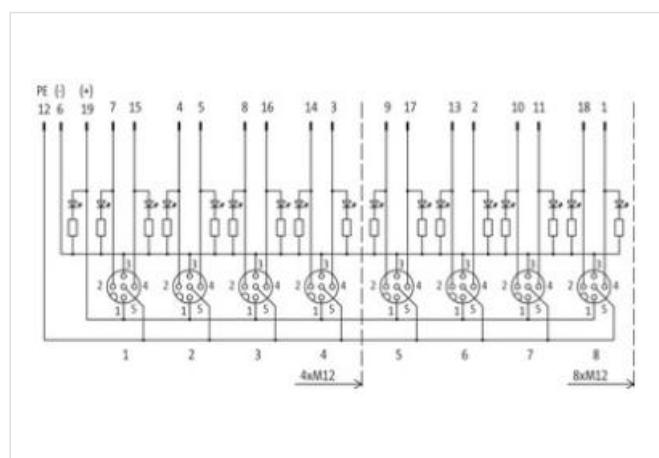
M23 plug connection

19-pole used

with LED for digital PNP-signals 24 V DC

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

**Link to Product****Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	24 V DC
Operating current per contact	max. 4 A
Protection	IP65/IP67

Housing	Plastic, flame retardant
---------	--------------------------

Total current	max. 8 A
---------------	----------

**General data**

Temperature range	-20...+80 °C
-------------------	--------------

**Contact Layout**

PIN 1	(+)
-------	-----

PIN 2	(NC)/(S2)
-------	-----------

PIN 3	(-)
-------	-----

PIN 4	(NO)/(S1)
-------	-----------

PIN 5	(Earth)
-------	---------

LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)	
--	--

Product article number of manufacturer	8000-84520-0000000
--	--------------------