



EXACT12, 4XM12, 5-POLE, BASIC HOUSING, NPN-LED'S

Without homerun-cable


4-way, 5-pole  
Form NPN  
Screw plug-in terminals  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

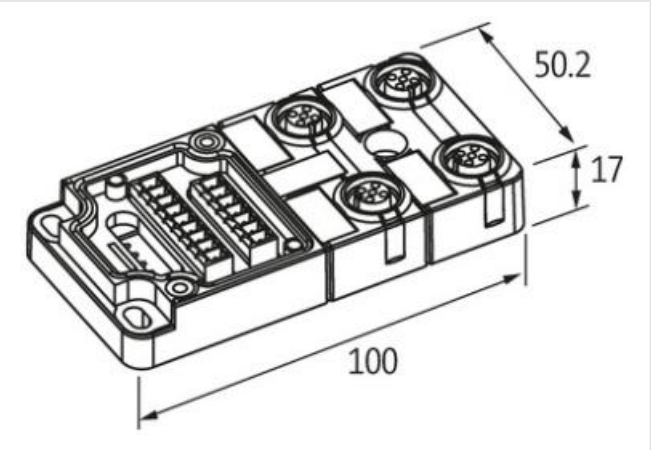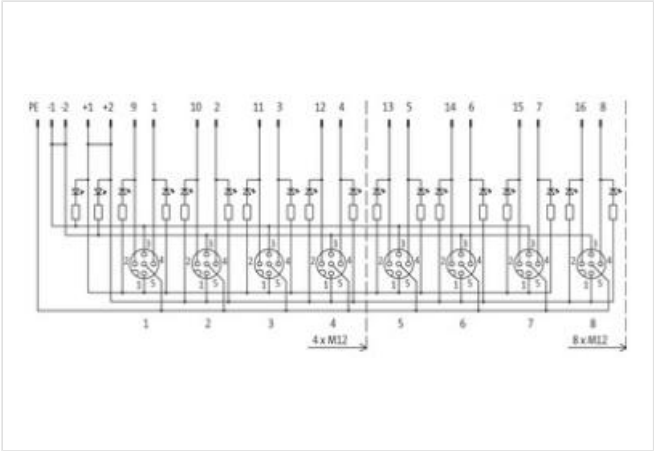

Product may differ from Image

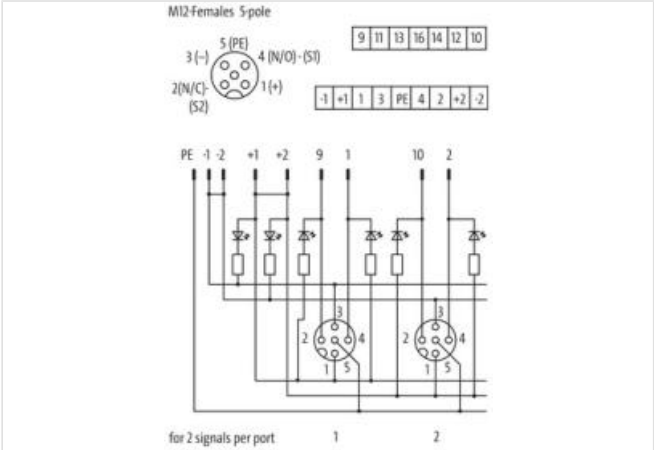

| Technical Data                |                          |
|-------------------------------|--------------------------|
| Operating voltage             | 24 V DC                  |
| Operating current per contact | max. 4 A                 |
| Protection                    | IP65/IP67                |
| Housing                       | Plastic, flame retardant |

Total current max. 8 A

**General data**

Temperature range -20...+70 °C

**Contact Layout**

PIN 1 (+)

PIN 2 (NC)/(S2)

PIN 3 (-)

PIN 4 (NO)/(S1)

PIN 5 (Earth)

LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)

Product article number of manufacturer 8000-84501-0000000