



EXACT12, 8XM12, 4 POLE BASIC HOUSING, W.O. LED'S

Without homerun-cable


8-way, 4-pole
without LED, up to 125 V AC/DC
Screw plug-in terminals
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.
Further cable lengths on request.

Link to Product

Illustration

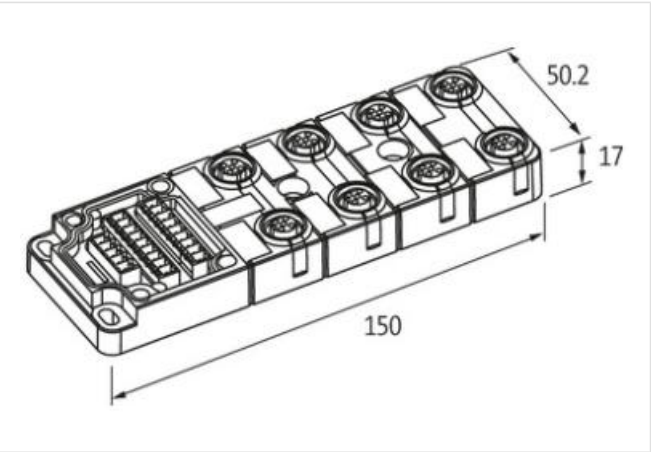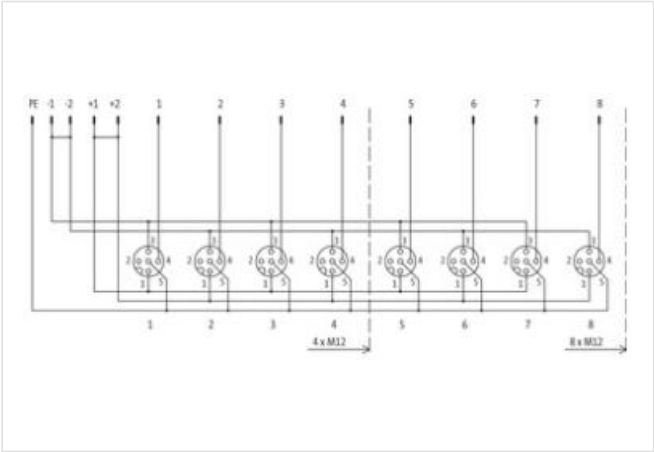

Product may differ from Image

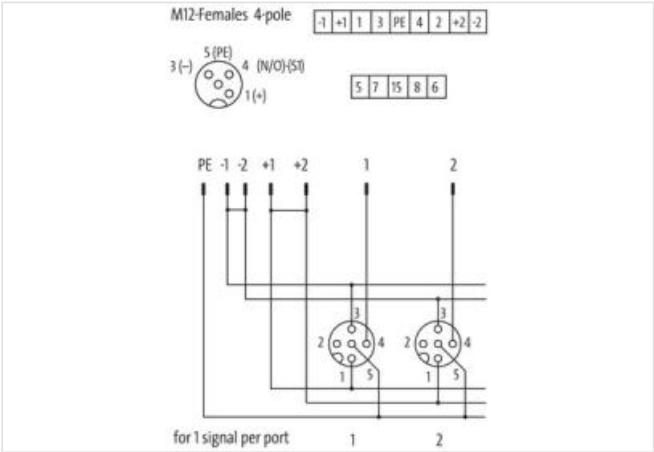

Technical Data	
Operating voltage	125 V AC/DC
Operating current per contact	max. 4 A
Protection	IP65/IP67

Housing	Plastic, flame retardant
---------	--------------------------

Total current	max. 8 A
---------------	----------

General data

Temperature range	-20...+70 °C
-------------------	--------------

Contact Layout

PIN 1	(+)
-------	-----

PIN 3	(-)
-------	-----

PIN 4	(NO)/(S1)
-------	-----------

PIN 5	(Earth)
-------	---------

Product article number of manufacturer	8000-88402-0000000
----------------------------------------	--------------------