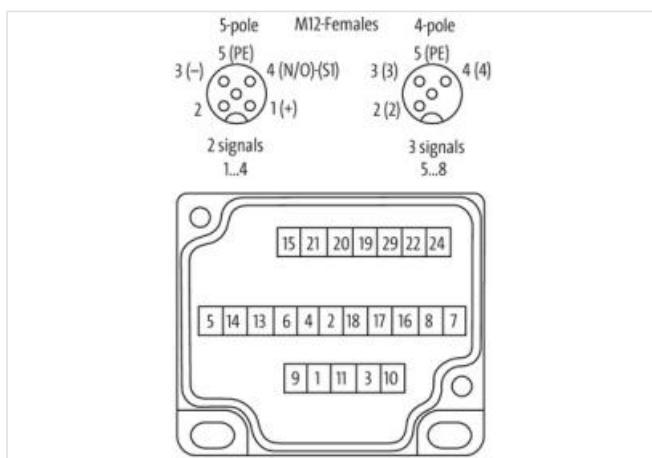
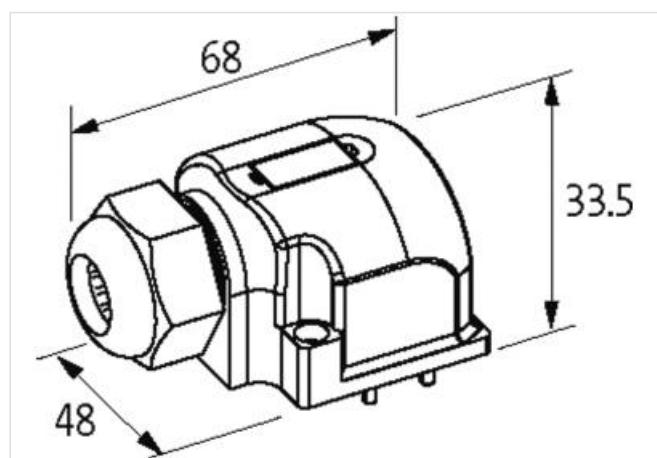
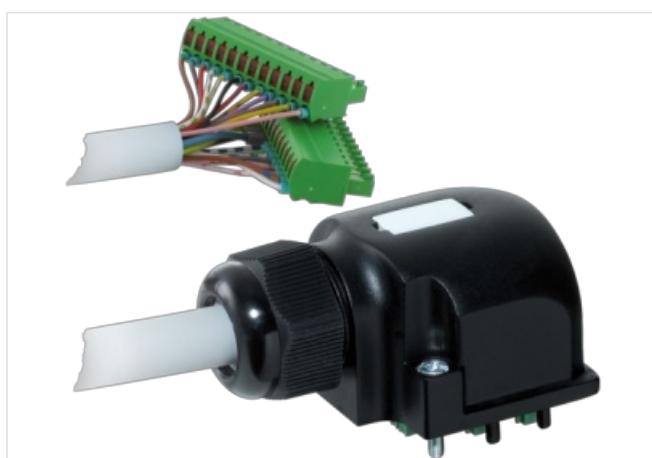


EXACT12 SAFETY, PRE-WIRED CAP AND ATT. TERMINALS

 3m PUR 20x0.34+3x0.75mm²

for 8-way distribution boxes, 5-, 4-pole
 Homerun cable with spring clamp terminals
 11/12-pole
 Further cable lengths on request.
 Plastic housings with good resistance against chemicals and oils.
 The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product
Illustration


Product may differ from Image


Form

Form 98749

Technical Data

Housing Plastic, flame retardant

Total current max. 8 A

General data

Temperature range -20...+80 °C, depending on cable quality

Cables

No./diameter of wires 20x 0.34 + 3x 0.75 mm²
 C-track properties 5 Mio.

Outer Ø 10.4 mm ±5%

Cable number 408

Approval (cable) cURus (AWM-Style 20233/10493); CE conform

Jacket Color gray

Temperature range (fixed) -40...+80 °C

Temperature range (mobile) -5...+80 °C

Bend radius (fixed) 7.5x outer Ø

Bend radius (moving) 10x outer Ø

Material (jacket) PUR (UL/CSA)

Product article number of manufacturer 8000-98749-4080300