

**CAP FOR D-BOX M12 4-WAY 5-POLE**

Pot.-sep. 15m PUR/PVC, 8x0,34+5X0.75

15.0 m

for 4-way distribution boxes, 5-pole


PUR/PVC

potentially separated

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

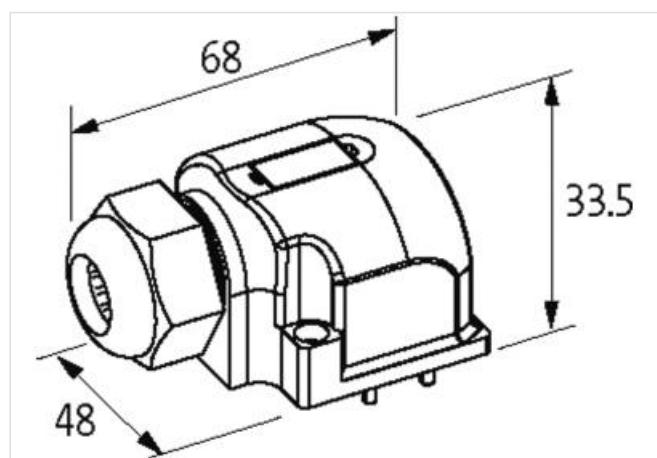**Link to Product****Illustration**

M12-Females 5-pole



Exact12



for 2 signals per port

Product may differ from Image

**Form**

Form 84659

**Technical Data**

Housing Plastic, flame retardant

Total current max. 8 A

**General data**

Temperature range -20...+80 °C, depending on cable quality

**Cables**

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

No./diameter of wires	8x 0.34 + 5x 0.75 mm <sup>2</sup>
-----------------------	-----------------------------------

Wire isolation	PVC
----------------	-----

C-track properties	1.5 Mio.
--------------------	----------

Outer Ø	9.2 mm ±5%
---------	------------

Cable number	374
--------------	-----

Color (jacket)	gray
----------------	------

Jacket Color	gray
--------------	------

Temperature range (fixed)	-30...+80 °C
---------------------------	--------------

Temperature range (mobile)	-30...+80 °C
----------------------------	--------------

Bend radius (fixed)	10x outer Ø
---------------------	-------------

Bend radius (moving)	12x outer Ø
----------------------	-------------

Material (jacket)	PUR/PVC
-------------------	---------

Product article number of manufacturer	8000-84659-3741500
--	--------------------