

### CAP FOR D-BOX M12 8-WAY 4 POLE

No pot.-sep. 30m PUR, 8x0,5+3x1,0

30.0 m

for 8-way distribution box, 4-pole


Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.



The resistance to aggressive media should be individually tested for your application. Further details on request.

#### [Link to Product](#)

##### Illustration

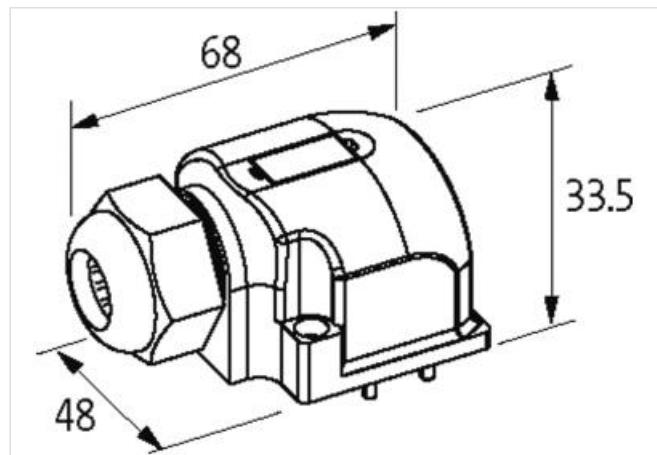

M12 Females 4-pole



for 1 signal per port

Product may differ from Image

##### Form

Form 88459

##### Technical Data

Housing Plastic, flame retardant  
Total current max. 8 A

##### General data

Temperature range -20...+80 °C, depending on cable quality

##### Cables

No./diameter of wires 8x 0.5 + 3x 1.0 mm<sup>2</sup>  
C-track properties 5 Mio.

The information in this brochure has been compiled with the utmost care.

Liability for the correctness, completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Outer Ø	9.4 mm ±5%
Cable number	447
Jacket Color	gray
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-5...+80 °C
Bend radius (fixed)	5× outer Ø
Bend radius (moving)	10× outer Ø
Material (jacket)	PUR (UL/CSA)
Product article number of manufacturer	8000-88459-4473000