



CAP FOR D-BOX M12 8-WAY 5-POLE

Pot.-sep. 3m PUR/PVC, 16x0,34+5X0.75

3.0 m
for 8-way distribution boxes, 5-pole
potentially separated
Further cable lengths on request.
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

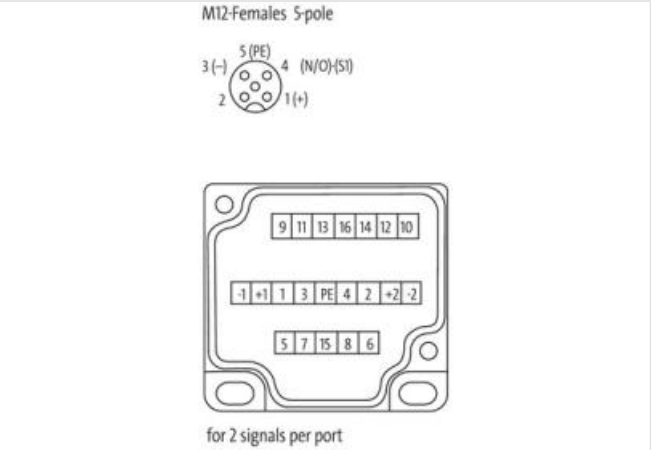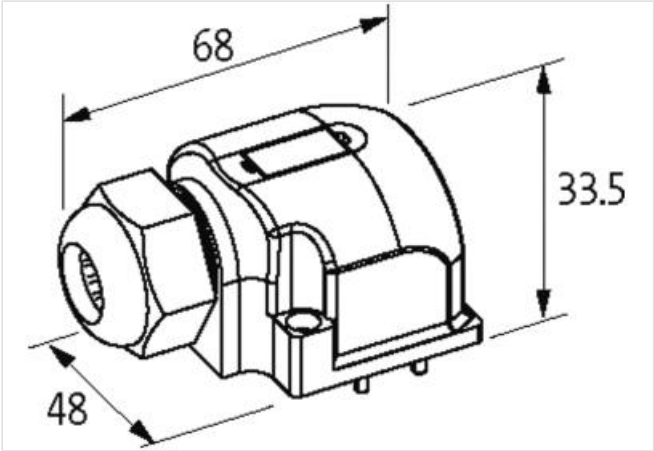

Product may differ from Image

Form	
Form	88659
Technical Data	
Housing	Plastic, flame retardant
Total current	max. 8 A
General data	
Temperature range	-20...+80 °C, depending on cable quality
Cables	
No./diameter of wires	16× 0.34 + 5× 0.75 mm²

Wire isolation	PVC
C-track properties	1.5 Mio.
Outer Ø	12.5 mm ±5%
Cable number	404
Material (wire)	Cu wire, bare
Resistor (core)	max. 57 Ω/km (0.34 mm ²), max. 26 Ω/km (0.75 mm ²); (20 °C)
Jacket Color	gray
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-30...+80 °C
Bend radius (fixed)	10× outer Ø
Bend radius (moving)	12× outer Ø
Material (jacket)	PUR/PVC

Product article number of manufacturer	8000-88659-4040300
--	--------------------