


Cube67 Diagnostic Gateway

Diagnosis made easy, Simple system overview


Cube67
Diagnostic gateway
Ethernet TCP/IP

Link to Product

Illustration

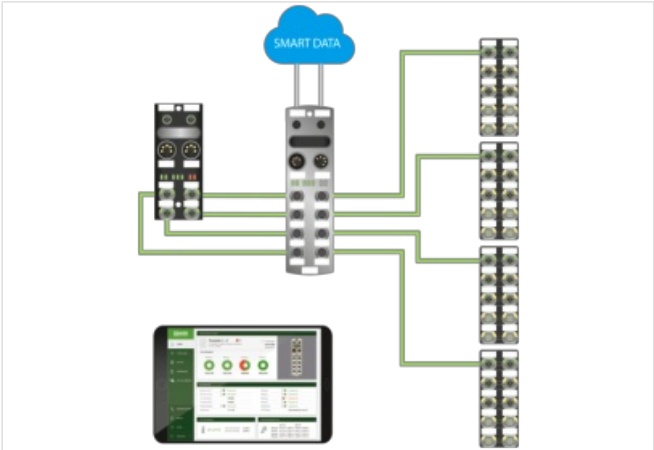

Product may differ from Image

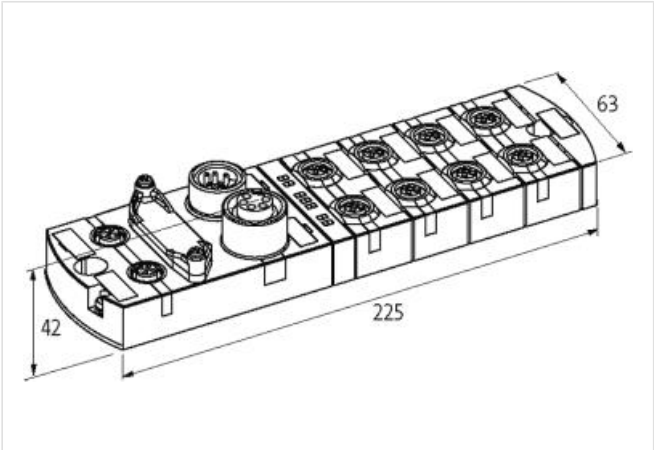

General data	
Mounting method	2-hole screw mounting
Temperature range	0...+55 °C (storage temperature -25...+70 °C)
Protection	IP67
Dimensions HxWxD	42x63x225 mm
Module supply	
Operating voltage	24 V DC ±25%

Current consumption	max. 200 mA
---------------------	-------------

Cube system

Cube67 system connection	yes
--------------------------	-----

Connections

Fieldbus	2× M12 (female), D-coded
Supply	2× 7/8" (male/female), 5-pole
Internal system connection	8× M12 (female), 6-pole

Protection

Reverse polarity protection module	yes
Over voltage protection	yes

Product article number of manufacturer	56968
--	-------