

IMPACT67 COMPACT MODULE, PLASTIC

Profibus DP, 16 dig Out

Digital outputs

DO16 - 0.5 A

PROFIBUS 12 Mbit/s; M12, B-coded

7/8", 5-pole, 2× max. 9 A

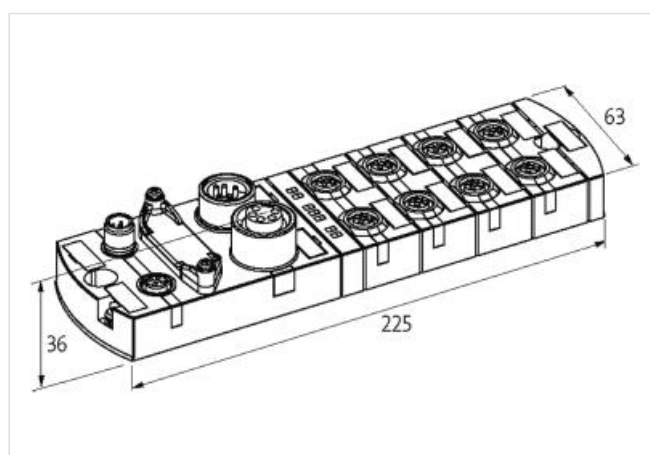
M12, 5-pole, A-coded

Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	2-hole screw mounting, compatible with I/O modules of MVK model range
Temperature range	0...+55 °C (storage temperature -25...+70 °C)
Protection	IP67
Dimensions H×W×D	39×63×225 mm

PROFIBUS

Addressing	Rotary switch 3...99
------------	----------------------

Output

Switching current per output	max. 0.5 A (short-circuit and overload protected)
------------------------------	---

Connections

Fieldbus	PROFIBUS 12 Mbit/s; M12, B-coded
Sensor-system/actuator supply	7/8", 5-pole, 2× max. 9 A
I/O ports	M12, 5-pole, A-coded

Product article number of manufacturer	55348
--	-------

Diagnostic

Communication status	via LED
Diagnostic via LED	per module and channel

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Diagnostic via BUS	per module and channel
Monitoring - under voltage	yes
Monitoring - no voltage	yes