

EXACT8, 8XM8, 3 POLE PRE-WIRED CABLE

15.0m PUR/PVC 8*0,34+2*0,75

PUR/PVC

8-way, 3-pole

15.0 m




Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

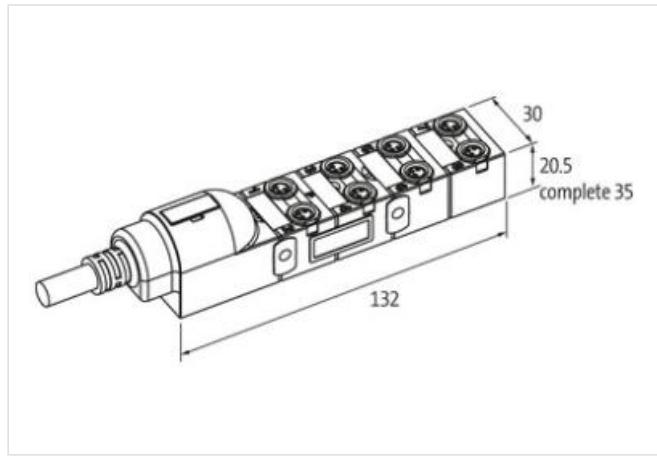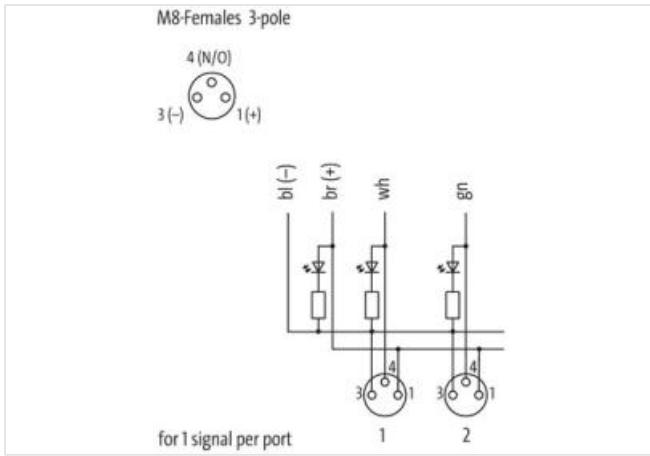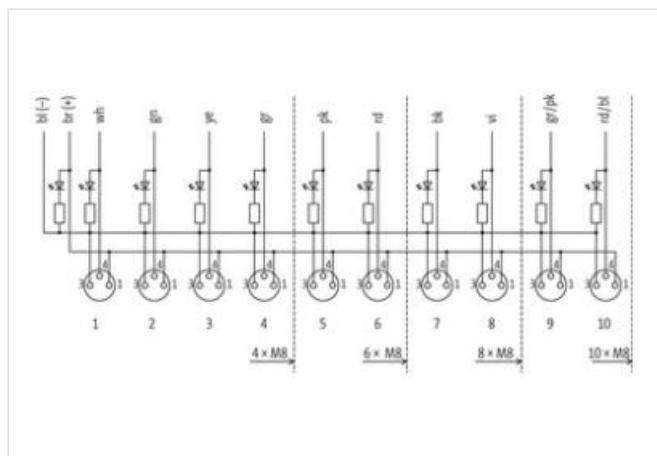

Product may differ from Image



Form

Form 88010

Technical Data

Operating voltage 24 V DC

Operating current per contact max. 2 A

Locking of ports	Screw thread (M8x1 mm)
Protection	IP65/IP67
Housing	Plastic, flame retardant
Signal per port	1 - (31-32)
Total current	max. 8 A
General data	
Temperature range	-20...+80 °C, depending on cable quality
Cables	
No./diameter of wires	8x 0.34 + 2x 0.75 mm ²
Wire isolation	PVC (vi, bk, rd, pk, gr, ye, gn, wh+br, bl)
C-track properties	2 Mio.
Outer Ø	8.6 mm ±5%
Cable number	357
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	5x outer Ø
Bend radius (moving)	10x outer Ø
Material (jacket)	PUR/PVC
Contact Layout	
PIN 1	(+)
PIN 3	(-)
PIN 4	(NO)/(S1)
LED (green): Power / LED (yellow): (S1)	
Product article number of manufacturer	8000-88010-3571500