

PRE-WIRED CAP FOR EXACT8, 4XM8, 4-POL


10.0m PUR/PVC 8x0,34+2x0,75


PUR/PVC 10.0 m

Link to Product

Illustration



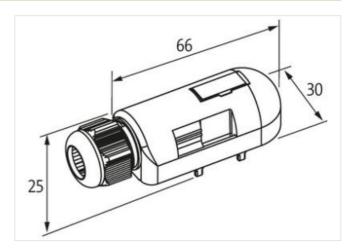



Product may differ from Image

| Technical Data | |
|-----------------------|---------------------------------------|
| Housing | Plastic, flame retardant |
| Total current | max. 8 A |
| General data | |
| Temperature range | -20+80 °C, depending on cable quality |
| Cables | |
| No./diameter of wires | 8× 0.34 + 2× 0.75 mm ² |
| Wire isolation | PVC |
| C-track properties | 1.5 Mio. |
| Outer Ø | 8.6 mm ±5% |
| Cable number | 358 |
| Color (jacket) | gray |
| Jacket Color | gray |

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13



| Temperature range (fixed) | -30+70 °C |
|--|--------------------|
| Temperature range (mobile) | -5+60 °C |
| Bend radius (fixed) | 10× outer Ø |
| Bend radius (moving) | 12× outer Ø |
| Material (jacket) | PUR/PVC |
| Product article number of manufacturer | 8000-84149-3581000 |