



EXACT12, 4XM12, 5 POLE

Conn.M12 12pole


4-way, 5-pole
M12 plug connection
12-pole used
with LED for digital PNP-signals 24 V DC
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

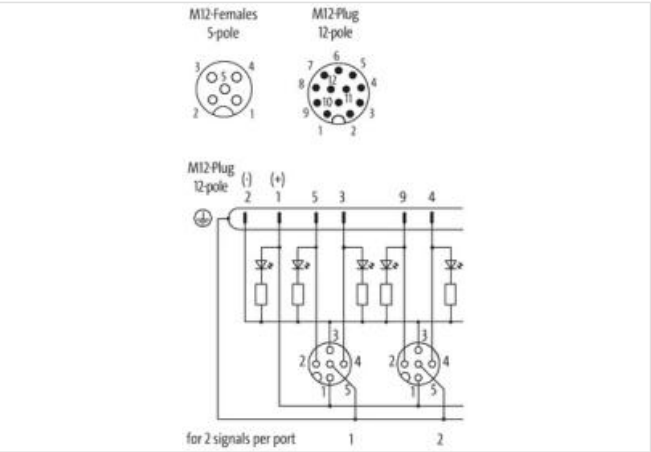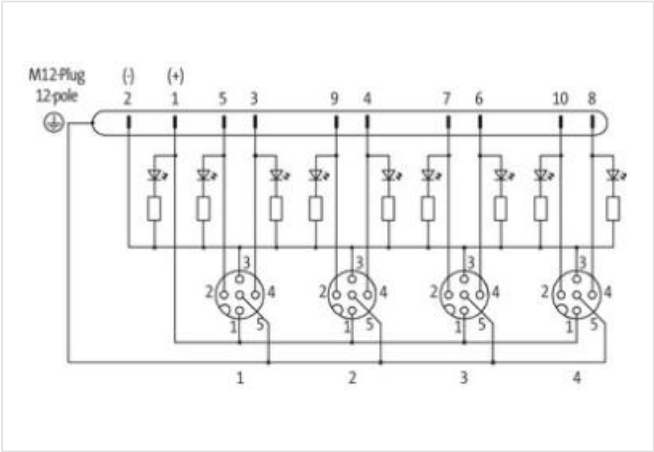

Product may differ from Image

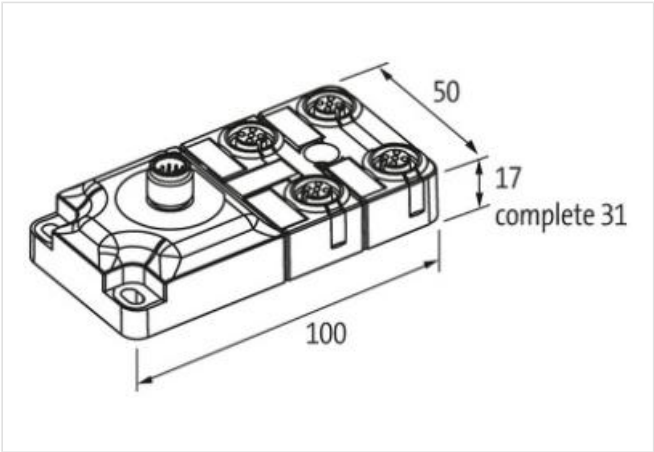

Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 1.5 A
Protection	IP65/IP67

Housing	Plastic, flame retardant
---------	--------------------------

Total current	max. 1.5 A
---------------	------------

General data

Temperature range	-20...+70 °C
-------------------	--------------

Contact Layout

PIN 1	(+)
-------	-----

PIN 2	(NC)/(S2)
-------	-----------

PIN 3	(-)
-------	-----

PIN 4	(NO)/(S1)
-------	-----------

PIN 5	(Earth)
-------	---------

	LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)
--	--

Product article number of manufacturer	8000-84560-0000000
--	--------------------