

PASSIVE-DIO° PLASTIC,6XM12,5POL,PRE-WIRED CABLE


5.0m PUR-JB 12*0,34+3*0,75


6-way, 5-pole PUR/PVC 5.0 m with LED for digital PNP-signals 24 V DC Further cable lengths on request. Plastic housings with good resistance against chemicals and oils.

Link to Product

Illustration



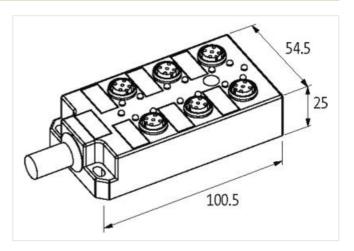



Product may differ from Image

Technical Data		
Operating voltage	24 V DC	
Operating current per contact	max. 4 A	
Locking of ports	Screw thread (M12×1 mm)	
Signal per port	2	
Total current	max. 10 A	
General data		
Temperature range	-20+80 °C	

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13



Protection	IP67 inserted and tightened (EN 60529)
Dimensions H×W×D	100.5×54.5×25 mm
Cables	
No./diameter of wires	12× 0.34 + 3× 0.75 mm²
Wire isolation	PVC (yebr, rd, grpk, wh, rdbl, gn, whgn, ye, brgn, gr, whye, pk, br, gnye, bl)
C-track properties	2 Mio.
Outer Ø	9.8 mm ±5%
Cable number	388
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-30+80 °C
Temperature range (mobile)	-5+70 °C
Bend radius (fixed)	10× outer Ø
Bend radius (moving)	12× outer Ø
Material (jacket)	PUR/PVC
Contact Layout	
PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
	LED (green): Power / LED (yellow): (S1/S2)
Product article number of manufacturer	27843