



PRE-WIRED CAP FOR EXACT8, 4XM8, 3 POLE

10.0m PUR 4X0.34+2x0,75, UL/CSA

10.0 m

[Link to Product](#)

Illustration

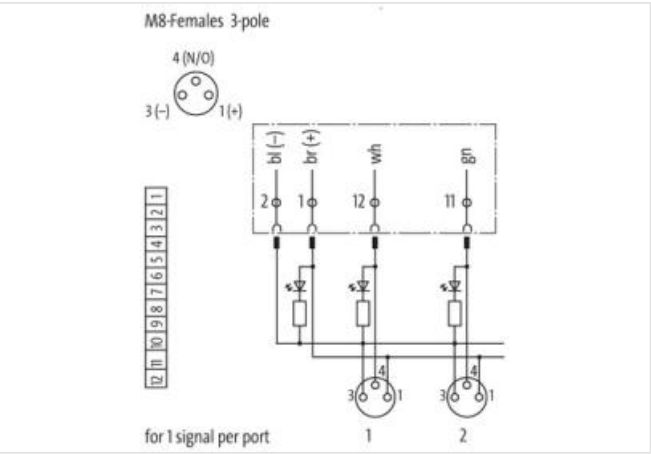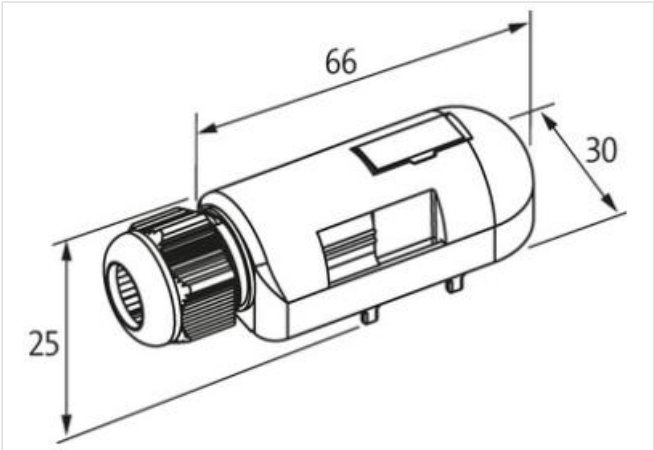

Product may differ from Image

| Form                  |                                          |
|-----------------------|------------------------------------------|
| Form                  | 84049                                    |
| Technical Data        |                                          |
| Housing               | Plastic, flame retardant                 |
| Total current         | max. 8 A                                 |
| General data          |                                          |
| Temperature range     | -20...+80 °C, depending on cable quality |
| Cables                |                                          |
| No./diameter of wires | 4× 0.34 + 2× 0.75 mm²                    |
| Wire isolation        | TPE-E                                    |
| C-track properties    | 5 Mio.                                   |
| Outer Ø               | 7.6 mm ±5%                               |
| Cable number          | 334                                      |

|                                        |                           |
|----------------------------------------|---------------------------|
| Approval (cable)                       | UL (AWM-Style 20233), CSA |
| Color (jacket)                         | gray                      |
| Jacket Color                           | gray                      |
| Temperature range (fixed)              | -40...+80 °C              |
| Temperature range (mobile)             | -5...+60 °C               |
| Bend radius (fixed)                    | 5× outer Ø                |
| Bend radius (moving)                   | 10× outer Ø               |
| Material (jacket)                      | PUR (UL/CSA)              |
| Product article number of manufacturer | 8000-84049-3341000        |