

EXACT12 SAFETY, GRUNDMODUL P1-4: M12, 5 POLE LED

P5-8: M12 3-pol. 1:1, no LED

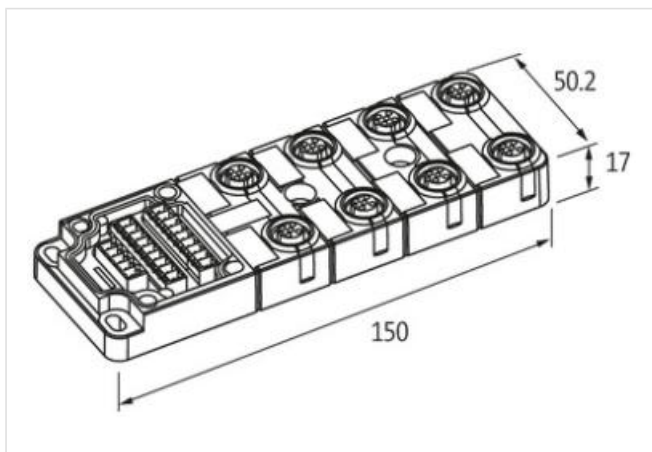
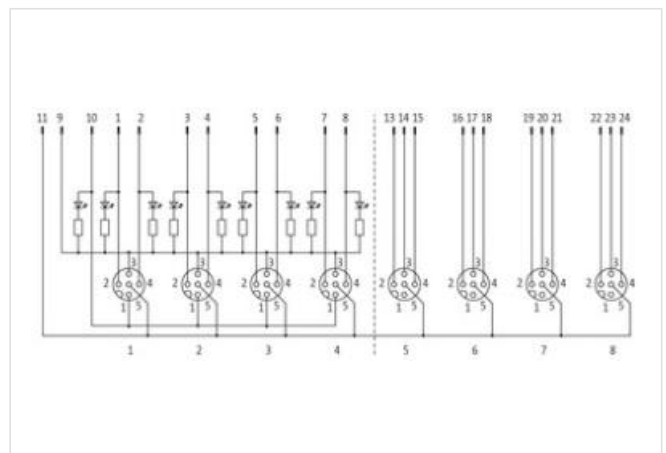
5-pole (port.1...4)

4-pole (port 5...8)

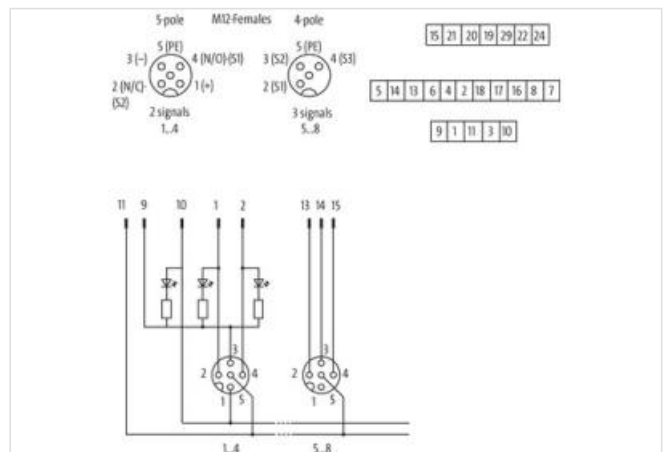
with LED for digital PNP-signals 24 V DC (port 1...4)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	24 V DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm)
Protection	IP65/IP67
Housing	Plastic, flame retardant

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Total current max. 8 A

General data

Temperature range -20...+60 °C

Product article number of manufacturer 8000-98700-0000000