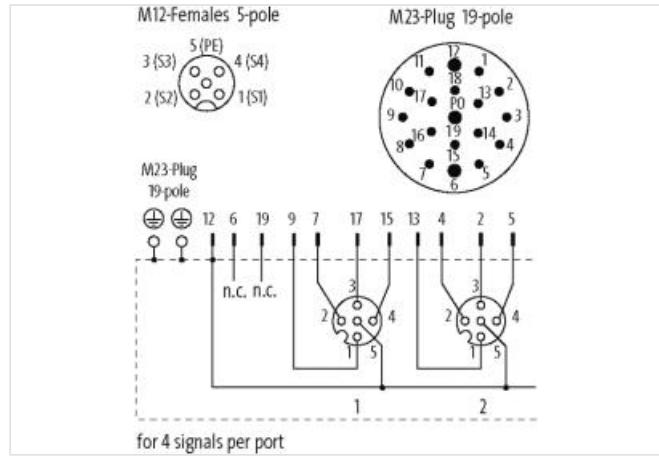
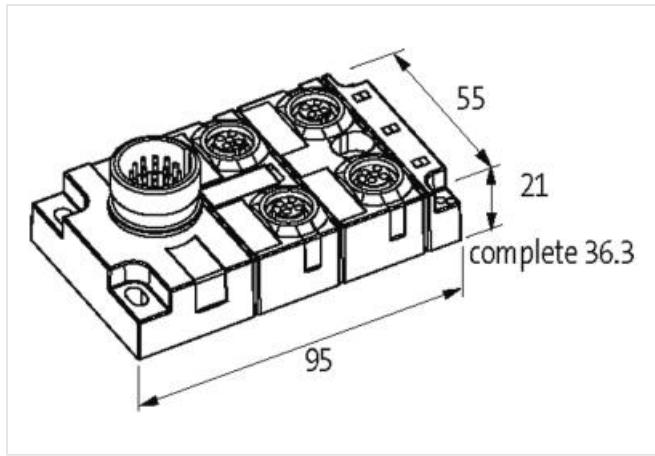
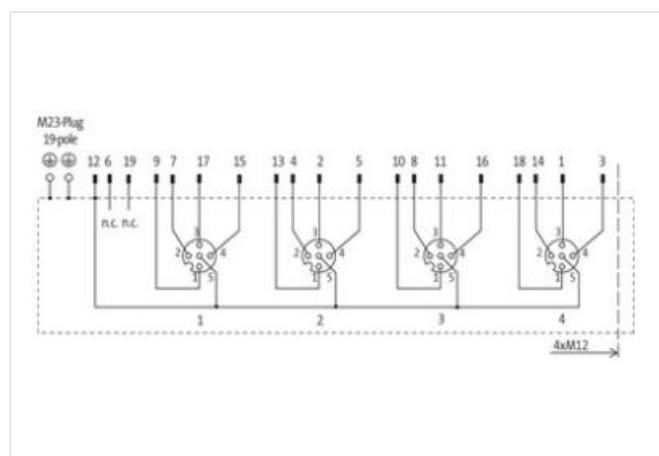


**MVP-METALL, 4XM12, 5POLE, M23 19POL. CON.**

Connector exit frontside

4-way UNIVERSAL, shielded  
 M23 plug connection, 19-pole  
 without LED for analog signals up to 125 V AC/DC  
 Replaces identical product (Art.No. 27533)  
 M12 contacts 1, 2, 3, 4 single wired; common PE

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	max. 125 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12x1 mm)
Protection	IP65, IP67, IP68

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Housing	Zinc die casting, matte nickel plated
---------	---------------------------------------

Total current	max. 7.5 A
---------------	------------

**General data**

Temperature range	-25...+90 °C
-------------------	--------------

**Contact Layout**

PIN 1	(S1)
-------	------

PIN 2	(S2)
-------	------

PIN 3	(S3)
-------	------

PIN 4	(S4)
-------	------

PIN 5	(S5)/(Earth)
-------	--------------

Product article number of manufacturer	8000-54722-0000000
--	--------------------