



MVP12N-ER8F-MP

Exact12, 8xM12, 5 pol.


5-pole, potentially separated  
rear connection  
Spring clamp terminals  
with LED for digital PNP-signals 24 V DC  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.  
flat gasket included

Link to Product

Illustration

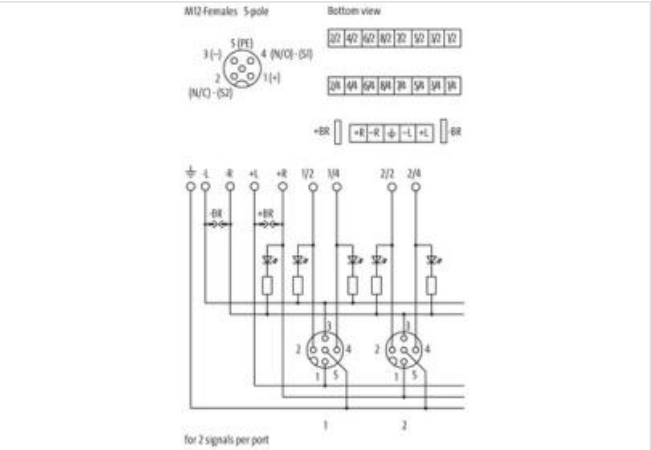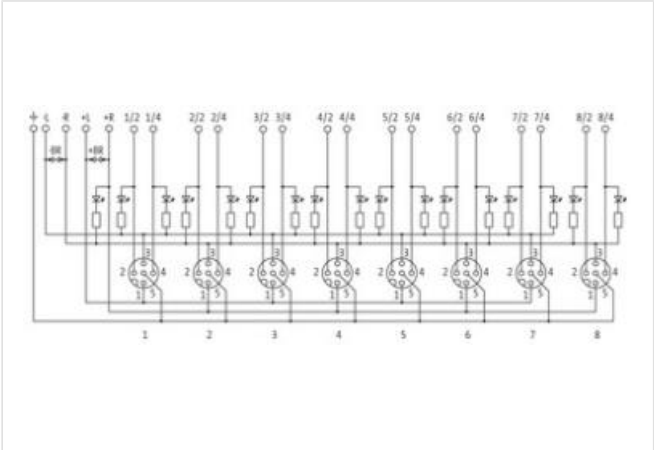

Product may differ from Image

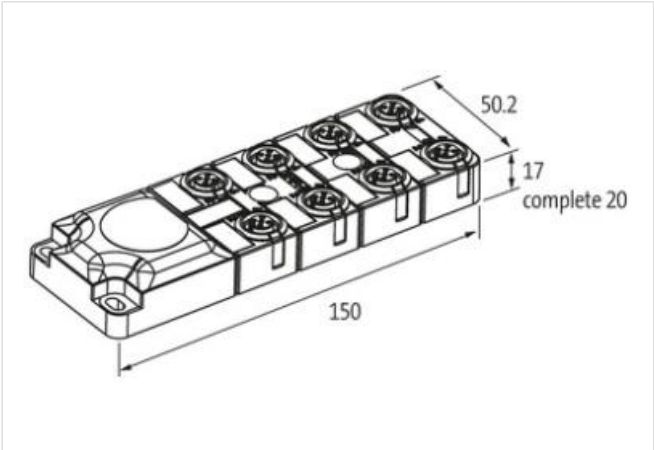

Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 4 A

Protection	IP65/IP67
Housing	Plastic, flame retardant
Total current	max. 2× 8 A

**General data**

Temperature range	-20...+70 °C
-------------------	--------------

**Contact Layout**

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)	

Product article number of manufacturer	8000-88680-0000000
--	--------------------