

## **CAP FOR D-BOX M12 8-WAY 4 POLE**

No pot.-sep. 3m PUR, 8x0,5+3x1,0

3.0 m

for 8-way distribution box, 4-pole

Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

## **Link to Product**

## Illustration



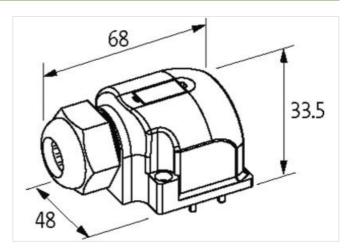



Product may differ from Image

Form	
Form	88459
Technical Data	
Housing	Plastic, flame retardant
Total current	max. 8 A
General data	
Temperature range	-20+80 °C, depending on cable quality
Cables	
No./diameter of wires	8× 0.5 + 3× 1.0 mm²
C-track properties	5 Mio.

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13



Outer Ø	9.4 mm ±5%
Cable number	447
Jacket Color	gray
Temperature range (fixed)	-40+80 °C
Temperature range (mobile)	-5+80 °C
Bend radius (fixed)	5× outer Ø
Bend radius (moving)	10× outer Ø
Material (jacket)	PUR (UL/CSA)
Product article number of manufacturer	8000-88459-4470300