

MVK E/A KOMPAKTMODUL, METALLAUSFÜHRUNG

Profibus DP, 8 dig. Aus / 8 dig. Ein/Diag

Digital inputs/outputs

DI8 DO8

PROFIBUS 12 Mbit/s; M12, B-coded

7/8", 5-pole, 2x max. 9 A

M12, 5-pole, A-coded

Connection cables are in the online shop under "Connection Technology".


Housing fully potted.

[Link to Product](#)

Illustration



Product may differ from Image

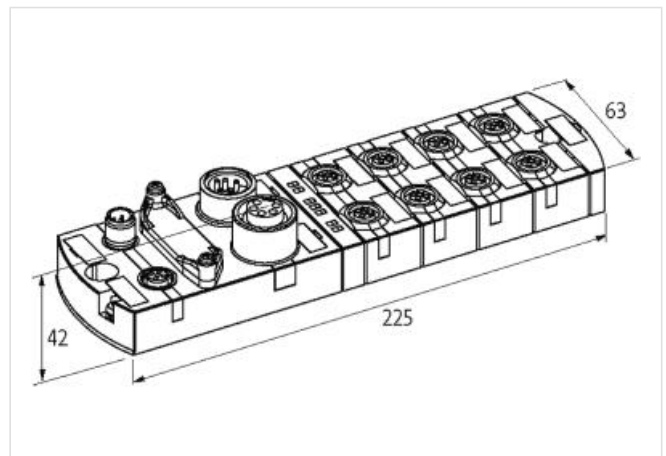

General data

Mounting method	2-hole screw mounting
Temperature range	-25...+55 °C (storage temperature -25...+70 °C)
Protection	IP67
Dimensions HxWxD	42x63x225 mm

PROFIBUS

Addressing	Rotary switch 1...99
------------	----------------------

Output

Lamp load	10 W
Actuator supply UA	24 V DC (EN 61131-2), max. 9 A
Switching current per output	max. 1.6 A (short-circuit and overload protected)

Input

Sensor supply US	24 V DC (EN 61131-2), max. 200 mA (M12 female), short-circuit and overload protected
Type	for 3-wire sensors or mechanical switches, PNP

Connections

Fieldbus	PROFIBUS 12 Mbit/s; M12, B-coded
Sensor-system/actuator supply	7/8", 5-pole, 2x max. 9 A

I/O ports	M12, 5-pole, A-coded
-----------	----------------------

Product article number of manufacturer	55274
--	-------

Diagnostic

Communication status	via LED
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module and channel
Actuator warning	per channel via LED and BUS
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Short-circuit and overload	yes
Cable break	per port