


Diffuse mode sensor

GLV30-LL-1227/40a/53/92





- M30 nickel plated brass threaded housing
- Light-on/dark-on switching
- For glass fibre light guide
- Extensive fiber optic product selection as accessories

Diffuse mode sensor



Dimensions



GLV30-8-2500
GLV30-8-H

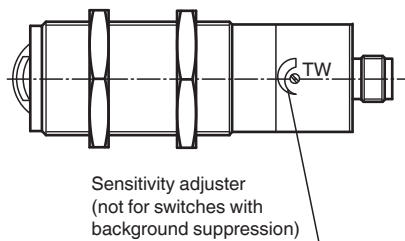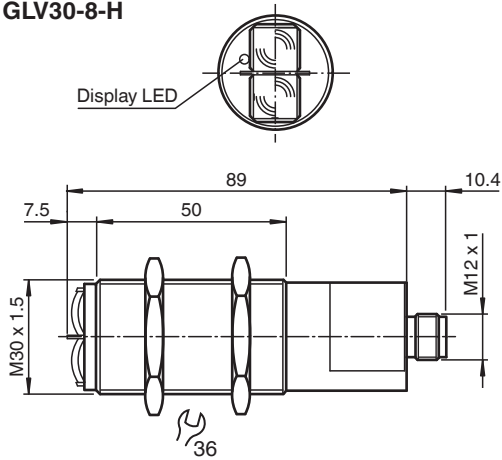

Unit connector



GLV30-LL...

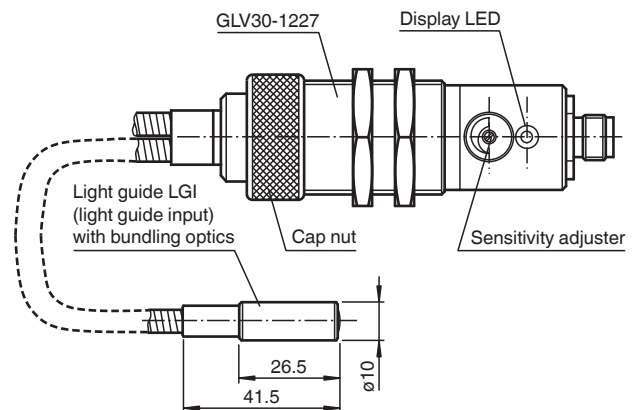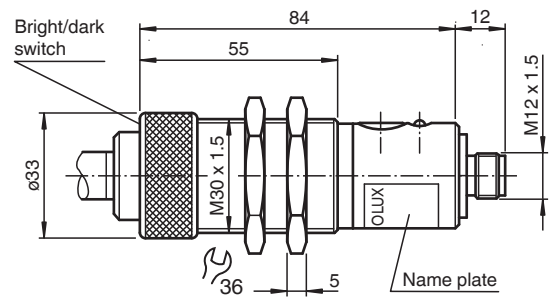

Technical Data

General specifications

Detection range	without fiberoptic cable : 0 ... 1700 mm , with fiberoptic cable see selection table for fiberoptic cables	
Adjustment range		250 ... 1700 mm (on use without fiberoptics)
Reference target	standard white 200 mm x 200 mm (only for retroreflective fiberoptic cables)	
Light source		IREL
Light type	modulated infrared light	
Diameter of the light spot		approx. 400 mm at 1700 mm sensor range
Opening angle	approx. 15 °	
Ambient light limit		50000 Lux

Indicators/operating means

Function indicator		LED yellow, lights up with receiver lit
Control elements	Sensitivity adjuster, light/dark switch	

Electrical specifications

Operating voltage	U _B	10 ... 30 V DC
Ripple		10 %
No-load supply current	I ₀	40 mA

Output

Switching type	light/dark on	
Signal output		1 PNP, not short-circuit protected
Switching voltage	max. 30 V DC	
Switching current		max. 500 mA
Response time	2 ms	
De-energized delay	t _{off}	7 ms

Conformity

Product standard		EN 60947-5-2
------------------	--	--------------

Approvals and certificates

EAC conformity		TR CU 020/2011
CCC approval	CCC approval / marking not required for products rated ≤36 V	
Approvals		CE


Ambient conditions

Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Storage temperature		-20 ... 75 °C (-4 ... 167 °F)

Mechanical specifications


Degree of protection	IP65	
Connection		4-pin, M12 metal connector
Material		
Housing		brass, nickel-plated
Optical face		glass
Mass		370 g

Connection Assignment

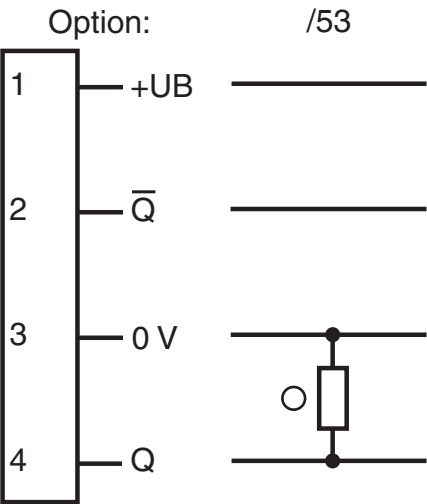


○ = Light on
● = Dark on

Connection Assignment




Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

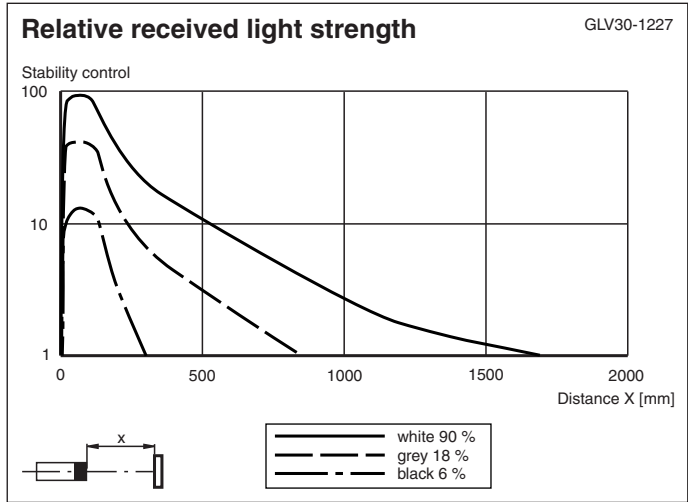

Release date: 2022-08-03 Date of issue: 2022-08-03 Filename: 419648_eng.pdf

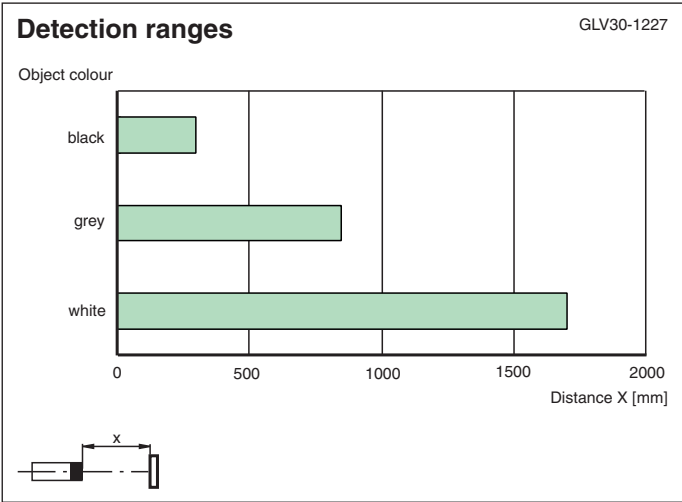

Accessories

	V1-G-2M-PUR	Female cordset single-ended M12 straight A-coded, 4-pin, PUR cable grey
	V1-W-2M-PUR	Female cordset single-ended M12 angled A-coded, 4-pin, PUR cable grey
	BF 30	Mounting flange, 30 mm
	BF 30-F	Plastic mounting adapter, 30 mm

Release date: 2022-08-03 Date of issue: 2022-08-03 Filename: 419648_eng.pdf

Selection table for fibre

	Model number	Max. sensing range / detection range in mm	Figure
glass fibre optics, single path with metal-silicone coating	LLE 18/30-2,3-0,5-Z1	420	1
	LLE 18/30-2,3-1,0-Z 1	300	1
	LLE 18/30-2,3-2,0-Z 1	200	1
	LLE 18/30-2,3-1,0-WR	300	2
	LLE 18/30-2,3-0,5-WC3	400	3
	LLE 18/30-2,3-1,0-WC14	300	4
	LLE 18/30-2,3-1,0-WC32	250	5
	LLE 18/30-2,3-1,0-WC5	300	6
	LLE 18/30-2,3-1,0-WC10	300	7
	LLE 18/30-2,3-1,0-WC0	230	8
	LLE 18/30-2,3-1,0-WC20	250	9
	LLE 18/30-2,3-1,0-WC3	300	3
	LLE 18/30-1,6-0,5-Z1	200	1
	LLE 18/30-1,1-2,0-G	100	10
	LLE 18/30-2,3-1,5-G	250	10
glass fibre optics, reflex with metal-silicone coating	LLE 18/30-1,9-0,5-Z1	130	15
	LLE 18/30-1,9-1,0-Z1	120	15
	LLR 18/30-1,9-0,5-WC0	70	16
	LLR 18/30-1,9-1,0-WC2	90	17
	LLR 18/30-1,9-0,5-WC5	90	18
	LLR 18/30-1,9-1,0-WR	90	19
	LLR 18/30-1,9-1,5-G	100	20
	LLR 18/30-1,6-1,0-QW 1x4	70	21
glass fibre optics reflex with metal coating	LMR 18/30-1,9-1,0-Z1	120	15
	LMR 18/30-1,9-3,0-Z1	85	15
	LMR 18/30-1,9-1,5-Z1	100	15

Other lengths and end pieces available on request

Fig. 1

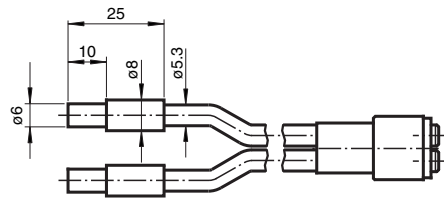


Fig. 2

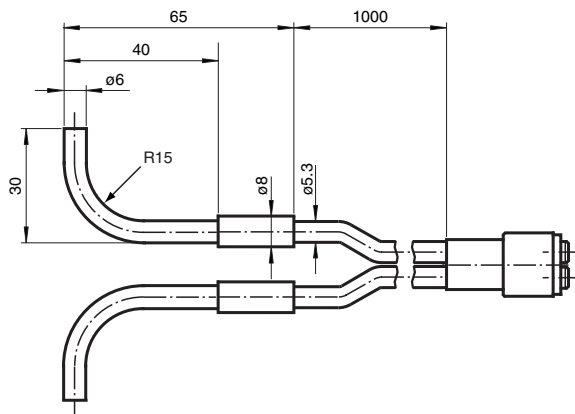


Fig. 3

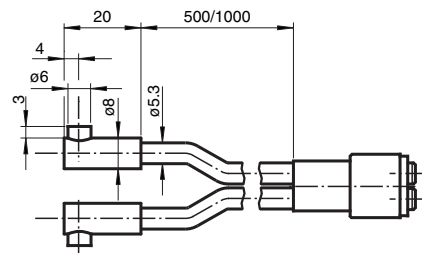


Fig. 4

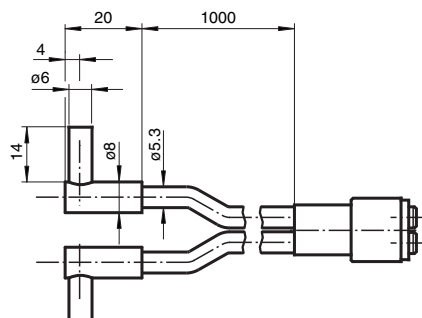


Fig. 5

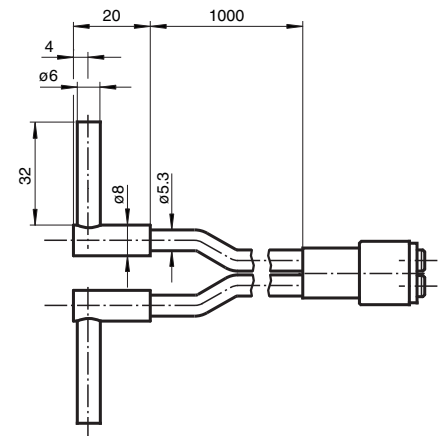


Fig. 6

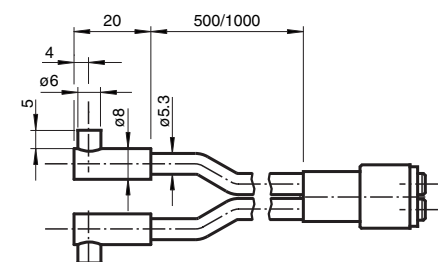


Fig. 7

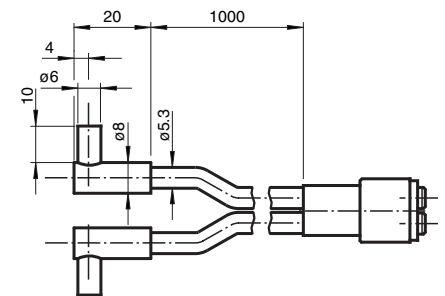


Fig. 8

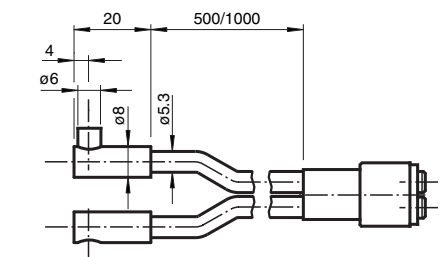


Fig. 9

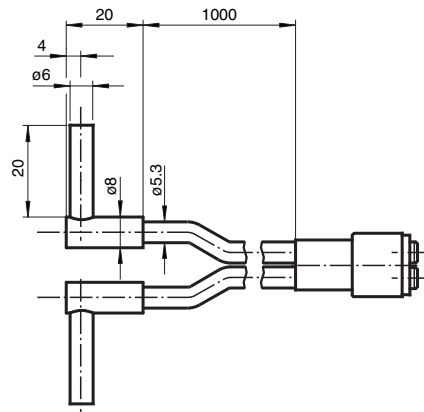


Fig. 13

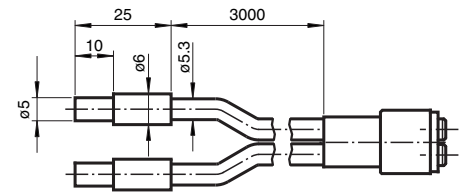


Fig. 10

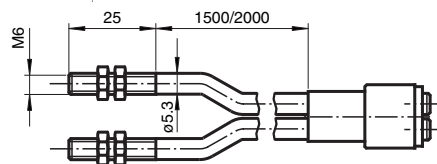


Fig. 14

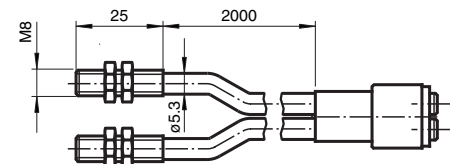


Fig. 11

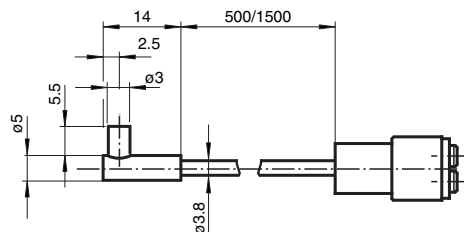


Fig. 15

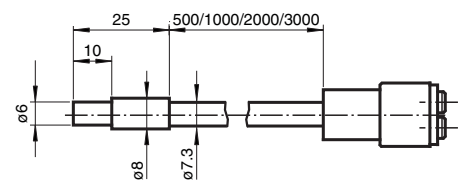


Fig. 12

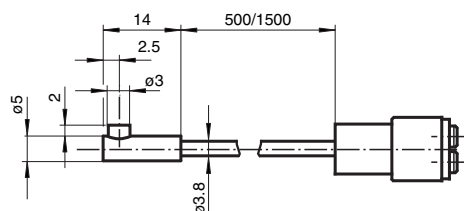


Fig. 16

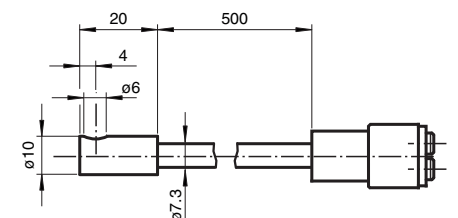


Fig. 17

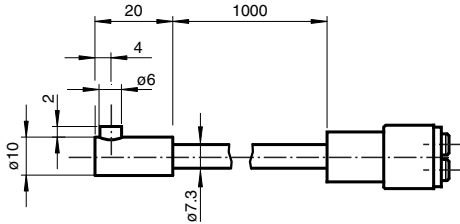


Fig. 20

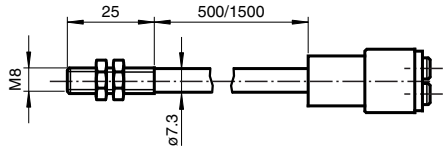


Fig. 18

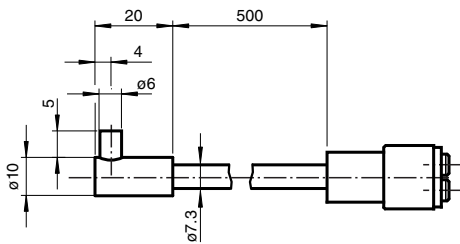


Fig. 21


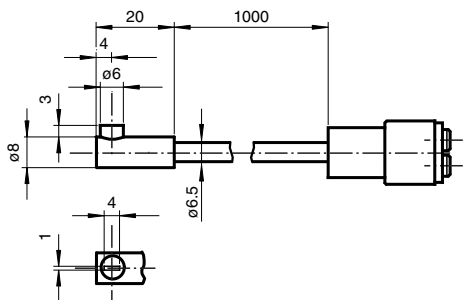


Fig. 19

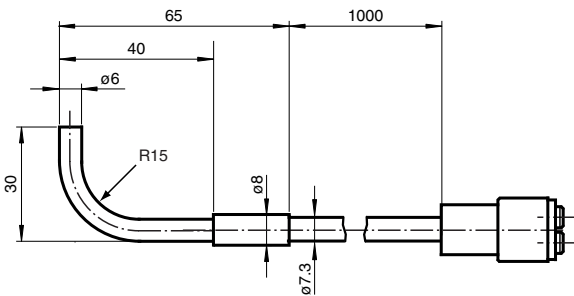

Release date: 2022-08-03 Date of issue: 2022-08-03 Filename: 419648_eng.pdf