



Diffuse mode sensor WTS10-12-4016/103/105



- Specifically for quality checks on welding caps
- Upper and lower welding caps checked simultaneously
- High position and angle tolerance insensitivity of the welding cap
- Pre-fault indication
- Scratch resistant mineral glass lens

Diffuse mode sensor




Function

The welding tip sensor WTS10 series is a contrast evaluation sensor with a large and homogeneous light spot fitted to check the quality of the welding cap's face after milling of the welding tip and which is widely used for industrial welding robots. After the milling process of the welding cap, both tips of the welding gun are inspected and defects such as inclusions, faulty milling or burrs are detected.

Simultaneous control of the quality of both welding tip caps with one sensor is possible by providing two optical outputs on either side of the sensor housing.

The WTS10 features an extended detection area of 11 mm diameter, an uniform lightspot over the full sensing range due to coaxial optics beam path, a new display concept, high switching accuracy, a homogenous light spot and improved position and tilting angle tolerance.

Dimensions

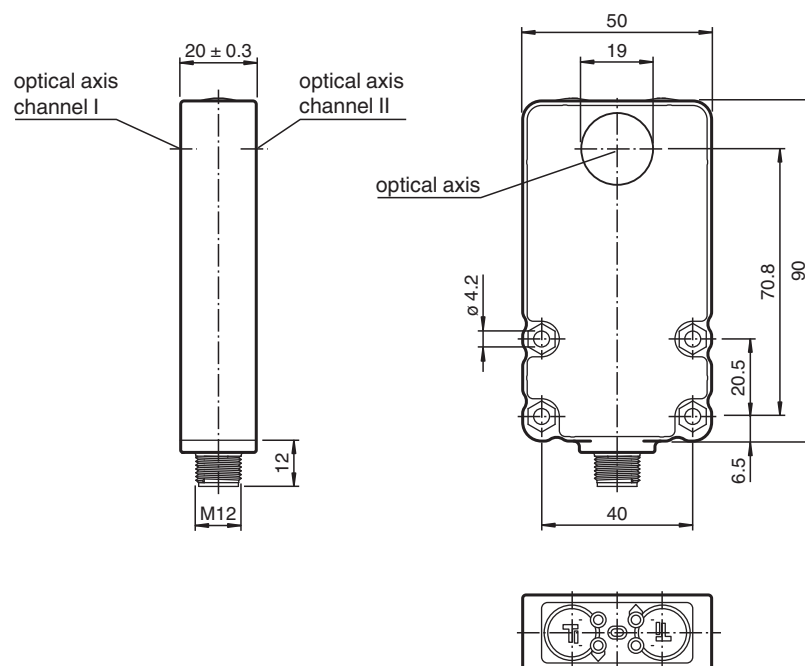

Technical Data

General specifications

Detection range	2 ... 12 mm
Reference target	Copper welding-electrode Diameter: 16 mm , Front end: 6 mm
Light source	LED
Light type	modulated visible red light , 640 nm
Ambient light limit	continuous light 40000 Lux , Modulated light 5000 Lux
Tilting angle	± 1.5 °
Position tolerance	± 2 mm

Indicators/operating means

Operation indicator	LED green: Power on
Function indicator	LED yellow: switching state LED red: Pre-fault indication
Teach-In indicator	LED, green/yellow flashing (approx. 4 Hz) Teach Error: LED green/yellow non equiphase flashing; 8.0 Hz
Control elements	Teach-In key

Electrical specifications

Operating voltage	U_B	10 ... 30 V DC
No-load supply current	I_0	≤ 70 mA

Input

Function input	Enable keys (EK)
----------------	------------------

Output


Switching type	light-on
----------------	----------

Technical Data

Signal output		switching output PNP NO contact AND logic coupling of both sensor channels short-circuit protected reverse polarity protected
Switching current		max. 100 mA
Switching frequency	f	100 Hz
Response time		5 ms
Conformity		
Product standard		EN 60947-5-2
Compliance with standards and directives		
Standard conformity		
Shock and impact resistance		IEC / EN 60068. half-sine, 50 g in each X, Y and Z directions
Vibration resistance		IEC / EN 60068-2-6. Sinus. 10 -150 Hz, 5 g in each X, Y and Z directions
Approvals and certificates		
EAC conformity		TR CU 020/2011
Protection class		II, rated voltage ≤ 250 V AC with pollution degree 1-2 according to IEC 60664-1
UL approval		cULus Listed
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		0 ... 50 °C (32 ... 122 °F) The switching accuracy will remain, if the temperature after Teach-In does not varies more than ±7 °C
Storage temperature		-20 ... 70 °C (-4 ... 158 °F)
Mechanical specifications		
Degree of protection		IP67
Connection		5-pin, M12 x 1 connector
Material		
Housing		PC + ABS
Optical face		Scratch resistant mineral glass lens
Mass		80 g


Connection Assignment

Option:

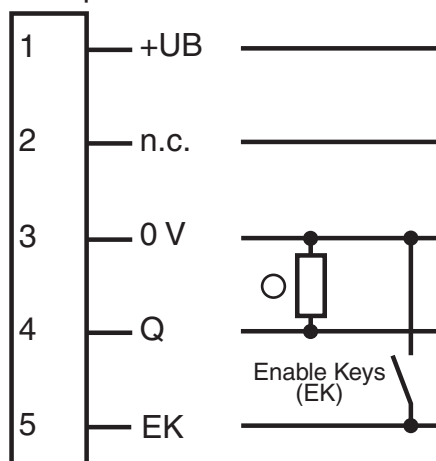


○ = Light on
● = Dark on

Connection Assignment





Assembly




1	LED Power On	green
2	LED channel I	red
3	LED channel I	yellow
4	Teach-In channel I	
5	LED channel II	yellow
6	LED channel II	red
7	Teach-In channel II	

Characteristic Curve

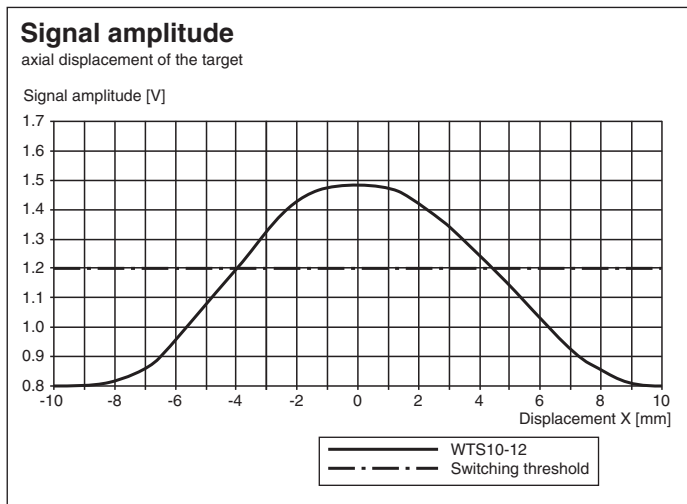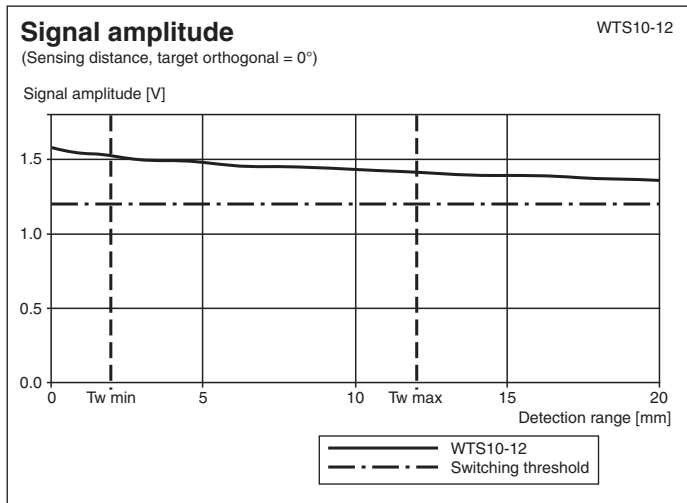

Release date: 2022-02-07 Date of issue: 2022-02-07 Filename: 207057_eng.pdf

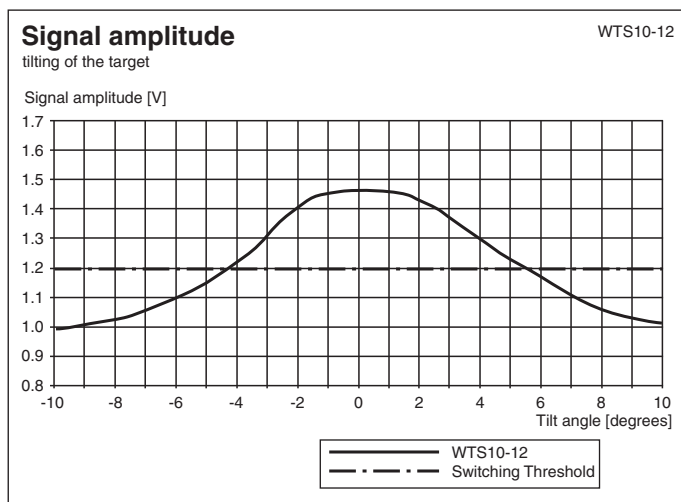

Teach-In

To enable the teach-in keys, pin 5 (enable keys, EK) must be continuously connected to 0 V (bridge between pin 5 and pin 3).

1. Position the reference welding cap in front of the optical system of the desired sensor channel (channel I or channel II).
2. Press and hold the corresponding teach-in button. The sensor confirms the keystroke by the green signal indicator being extinguished briefly (200 ms). After 2 s the sensor switches to teach-in mode: both switching outputs are deactivated. The sensor is taught the properly milled welding cap as a reference sample for the selected sensor channel.
3. When the green signal indicator and the yellow signal indicator that belongs to the selected sensor channel flash simultaneously, release the teach-in button. Teach-in is completed. The green signal indicator and the yellow signal indicator that belongs to the selected sensor channel flash alternately for 2 s.

Teach-in successful: The taught reference welding cap is permanently saved. The sensor switches back to switching mode.

Teach-in unsuccessful: The green signal indicator and the yellow signal indicator that belongs to the selected sensor channel flash quickly (approx. 8 Hz) and alternately for 5 s. The sensor discards the taught values. After 5 s the sensor switches to switching mode and works with the last valid values. For signal levels below the fixed switching threshold, the teach-in mode can't be entered. A teach-in error is indicated.

Accessories

	OMH-WTS10-01	Mounting bracket for sensors of WTS10 series
	V15-G-2M-PVC	Female cordset single-ended M12 straight A-coded, 5-pin, PVC cable grey
	V15-G-2M-PUR	Female cordset single-ended M12 straight A-coded, 5-pin, PUR cable grey
	V15-W-5M-PVC	Female cordset single-ended M12 angled A-coded, 5-pin, PVC cable grey