




Glass fiber optic FE-BTSAS6M-3

- Cylindrical sensing head
- Right angle optics
- 5/16 - 24 UNF thread
- Flexible PVC sheathing

Glass fiber optic - diffuse

Dimensions

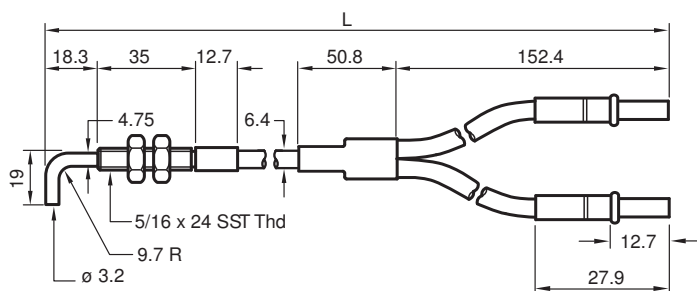

Technical Data

General specifications

Sensor range		MHP-FR: 36 mm MHP-F: 80 mm RL(K)61-LL: 155 mm MPG6HD: 170 mm
Fiber optic length	I	3 ft (.914 m)
End piece		Optical axis: Right angle Type: Cylindrical / smooth barrel Thread size: 5/16 - 24 UNF
Bending radius		min. 19 mm
Fiber bundle diameter		3.2 mm

Ambient conditions

Ambient temperature		-40 ... 120 °C (-40 ... 248 °F)
---------------------	--	---------------------------------

Mechanical specifications

Material		
Optical face		glass
Sheathing		PVC
Core		glass

Release date: 2020-11-02 Date of issue: 2020-11-02 Filename: 905140_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

End piece	Stainless steel 1.4305 / AISI 303, brass
Adapter	Stainless steel, 4.7 mm diameter
General information	
Scope of delivery	2 hex nuts included
Fiber optic amplifiers	
Device series	MP, MHP, Series 61

Installation

Note: If after installing the device the yellow signal indicator lights up or flashes, the sensor detects a nonexistent object. Reduce the sensitivity of the sensor.

Application

Attention:

Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.

