




SAFE LOAD HOLDING PO CHECK SENSING VALVES

SV27 SERIES

PRODUCT CATALOG

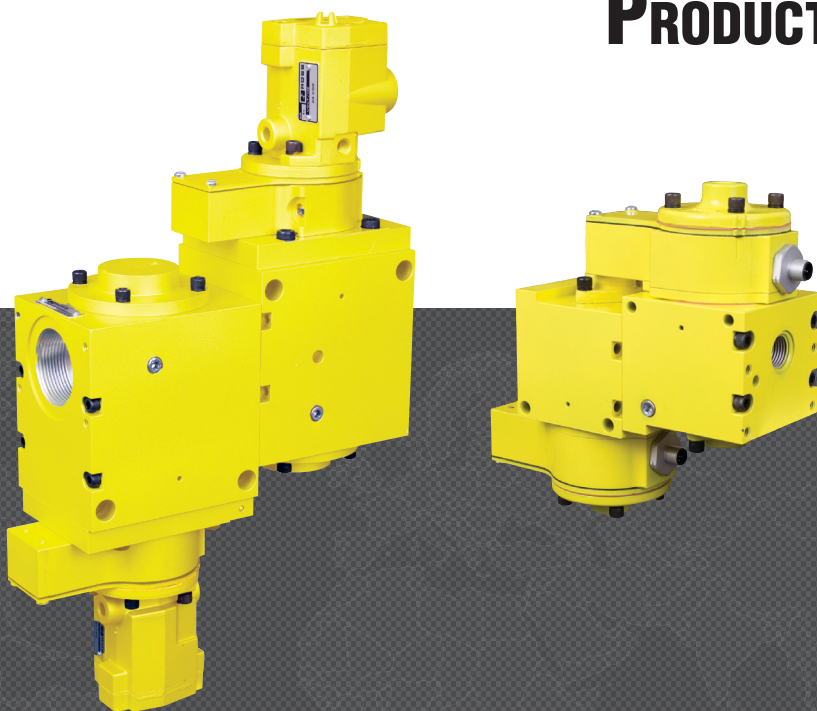





Safe Load Holding PO Check Sensing Valves SV27 Series

Product Overview

Sensing Safety Function

The SV27 Series Sensing Valve uses a safety-rated DPST (Double-Pole Single-Throw) switch to monitor the valve's operating position. The SV27 3/2 valve can be used for safe shut-off and exhaust functions for Category 2 applications with proper integration and monitoring. The feedback switch informs the controls that the valve internals have shifted properly.






Single (CAT-2 / PL c)		Redundant (CAT-3 / PL e)	
Solenoid Pilot Controlled	Pressure Controlled	Solenoid Pilot Controlled	Pressure Controlled
			

Pilot Operated Check valves are designed to trap pressure in order to hold a cylinder in place when a safety event occurs. The SV27 Series Sensing Valve uses a safety-rated DPST switch to monitor the valve's operating position. The SV27 PO Check valves can be used for load holding functions in Category 2 (single) or Category 3 (redundant) applications with proper integration and monitoring. The feedback switch informs the controls that the valve internals have shifted properly.

VALVE FEATURES

Poppet Design	Dirt tolerant, wear compensating for quick response and high flow capacity Poppet construction for near zero leakage & dirt tolerance
Sensing	Senses internal position & state
Electrical Feedback	Electrical feedback via DPST switch (Double-Pole Single-Throw)
Locking Protection	Directly operated safety-rated force-guided positive-break status switch (DPST)
Diagnostic Coverage	A diagnostic coverage (DC) of up to 90% can be obtained by monitoring the safety switch status
Mounting	Inline
SISTEMA Library	Available for download at rosscontrols.com

PRODUCT CREDENTIALS

Safety Category	TÜV Rheinland of North America Certificate	Declaration of Conformity		ISO Standard	CSA Certificate of Compliance	CRN Certification
	 Precisely Right.			ISO 13849-1:2015		Available for appropriately tested valves

STANDARD SPECIFICATIONS				
GENERAL	Function		2/2 Single or Redundant Valve	
	Construction Design		Poppet	
	Actuation		Electrical – Solenoid Pilot Controlled	
			Pneumatic – Pressure Controlled	
	Mounting	Type	Inline	
		Orientation	Any, preferably vertical	
	Connection		Threaded; G, NPT	
Minimum Operation Frequency		Once per month, to ensure proper function		
OPERATING CONDITIONS	Temperature	Ambient	40° to 120°F (4° to 50°C)	
		Media	40° to 175°F (4° to 80°C)	
	Flow Media		Filtered air	
	Operating Pressure		40 to 150 psig (2.8 to 10.3 bar)	
	Pilot Pressure		Must be equal to or greater than inlet pressure	
ELECTRICAL DATA	Switch Current/ Voltage	Maximum	2.5 A, 120 volts AC	
		Minimum	50 mA, 24 volts DC	
	Switch Rating		Rated in excess of 15 million cycles; electrical life of switch varies with conditions and voltage	
ELECTRICAL DATA FOR SOLENOID PILOT CONTROLLED VALVES	Solenoids		Operating Voltage	Power Consumption (each solenoid)
	CNOMO Style Pilot	Body Size 3/4	24 volts DC	6 watts
			110-120 volts AC, 50/60 Hz	8.5 VA inrush, 30 VA holding
			230-240 volts AC, 60 Hz	
			Rated for continuous duty	
	Pacer Style Pilot	Body Size 1-1/4	24 volts DC	14 watts
			110-120 volts AC, 50/60 Hz	87 VA inrush, 30 VA holding
			230-240 volts AC, 60 Hz	
			Rated for continuous duty	
CONSTRUCTION MATERIAL	Valve Body		Cast Aluminum	
	Poppet		Acetal and Stainless Steel	
	Seals		Buna-N; Fluorocarbon	
	Manual Override (Solenoid Pilot Controlled)		Pacer Style Pilot (only)	Flush; rubber, non-locking
SAFETY DATA	Safety Integrity Level (SIL)		Certified by TÜV Rheinland in accordance to IEC 61508 and IEC 61511 safety integrity level 2 (SIL 2) and EN ISO 13849-1, PL c (with application specific diagnosis) in singular application with HFT = 0 and SIL 3 and PL e in redundant application with HFT≥1, for details see certificate.	
	Functional Safety Data	Category	Single	CAT 2, PL c
			Redundant	CAT 3, PL d
		B ₁₀₀		20,000,000
		PFH _D	Single	2.35x10 ⁻⁷
			Redundant	2.47x10 ⁻⁸
		MTTF _D	Single	98.15 (nop: 7360)
			Redundant	100 (nop: 7360)
		DC (obtained by monitoring safety switch status)		90%
	ROSS recommends testing the switch function and sealing for load holding valves every 8 hours.			
Vibration/Impact Resistance		Calculated to DIN EN 60068-2-6.		
IMPORTANT NOTE: Please read carefully and thoroughly all of the CAUTIONS, WARNINGS on the inside back cover.				

Ordering Information

Solenoid Pilot Controlled Valves

Model Number Configurator 2-Way 2-Position Valves

SV27

Series

N

Revision Level

C

Revision Level

11

Revision Level

540

Revision Level

8CS

Revision Level

AA

Revision Level

1A

Revision Level

Thread

G	D
NPT	N

Function

2/2 - Single (Cat-2)	11
2/2 - Redundant (Cat-3)	55

Mounting

Inline

Actuation


Solenoid Pilot

Current	Voltage*	
DC	24 V	1D
AC	110 V, 50 Hz	1A
	120 V, 50/60 Hz	
	230 V, 50/60 Hz	2A

* For other voltages consult ROSS.

Body Size	Port Size		
	Inlet	Outlet	
3/4	1/2	1/2	540
	3/4	3/4	550
	1	1	560
1-1/4	1	1-1/2	760
	1-1/4	1-1/2	770
	1-1/2	1-1/2	780

Function	Body Size	Port Size	Flow Cv	Weight lb (Kg)
		1, 2	1-2	
Single	3/4	1/2	4.5	5.0 (2.3)
		3/4	8.3	
		1	10.3	
	1-1/4	1	20	12.5 (5.6)
		1-1/4	29	
		1-1/2	33	
Redundant	3/4	1/2	3.8	10.0 (4.5)
		3/4	5.6	
		1	8	
	1-1/4	1	12	25.0 (11.3)
		1-1/4	19	
		1-1/2	22	

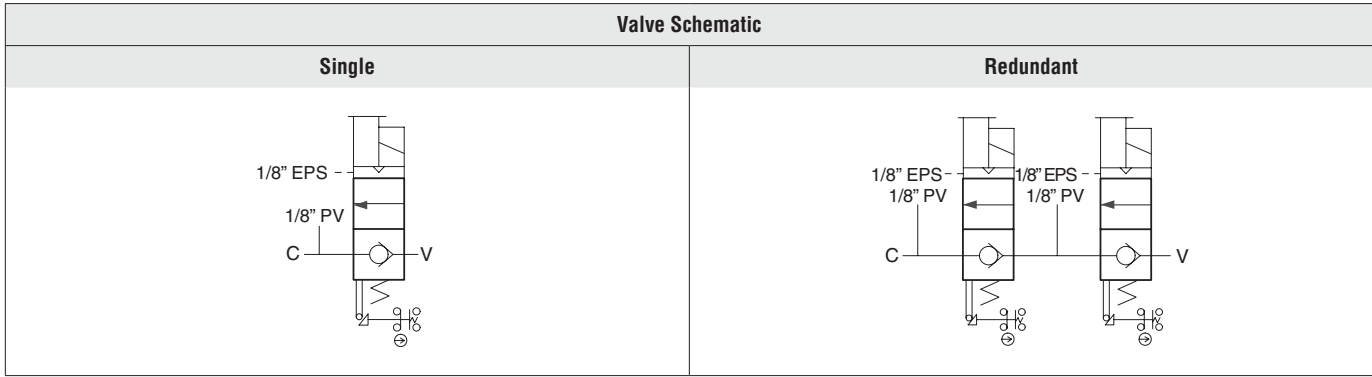

Pressure Controlled Valves

Model Number Configurator


2-Way 2-Position Valves

SV27	D	C	11	540	5AS	AA
Series		Revision Level			Mounting	
					Inline	
Thread						
G	D					
NPT	N					
Function						
2/2 - Single (Cat-2)						11
2/2 - Redundant (Cat-3)						55
Body Size		Port Size				
		Inlet	Outlet			
3/4	1/2	1/2	540			
	3/4	3/4	550			
	1	1	560			
1-1/4	1	1-1/2	760			
	1-1/4	1-1/2	770			
	1-1/2	1-1/2	780			


Function	Body Size	Port Size	Flow C _v	Weight lb (Kg)
		1, 2	1-2	
Single	3/4	1/2	4.5	4.0 (1.8)
		3/4	8.3	
		1	10.3	
	1-1/4	1	20	11.0 (5.0)
		1-1/4	29	
		1-1/2	33	
Redundant	3/4	1/2	3.8	9.0 (4.1)
		3/4	5.6	
		1	8	
	1-1/4	1	12	22.0 (10.0)
		1-1/4	19	
		1-1/2	22	

Valve Schematic

Single



Redundant



Valve Technical Data

DIMENSIONS		
Body Size	Single, Solenoid Pilot Controlled Valves	
3/4 (CNOMO Style Pilot)		
1-1/4 (Pacer Style Pilot)		
Redundant, Solenoid Pilot Controlled Valves		
3/4 (CNOMO Style Pilot)		
1-1/4 (Pacer Style Pilot)		
For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats, visit www.rosscontrols.com .		

DIMENSIONS

Body Size	Single, Pressure Controlled Valves	
3/4 (CNOMO Style Pilot)		
1-1/4 (Pacer Style Pilot)		
Redundant, Solenoid Pilot Controlled Valves		
3/4 (CNOMO Style Pilot)		
1-1/4 (Pacer Style Pilot)		
For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats, visit www.rosscontrols.com .		


Accessories

ENERGY RELEASE VERIFICATION

Visual Pressure Indicator	Verification Type	Installation Location	Indicator Type	Model Number		Port Thread
	Pneumatic	Pressure Sensing Port	Visual Pop-up Pin	988A30		1/8 NPT
Pressure Switch	Verification Type	Installation Location	Connector Type	Model Number	Port Thread	Factory Preset psi (bar)
	Electrical	Pressure Sensing Port or Downstream	DIN EN 175301-803 Form A	586A86	1/8 NPT	5 (0.3) falling

Pinout

DIN EN 175301-803 Form A



- 1 - Common
- 2 - Normally Closed
- 3 - Normally Open
- 4 - Ground (Not Used)

PREWIRED ELECTRICAL CONNECTORS

Prewired Connector Kits	Cable					Kit Number	
	End 1	End 2	Length meters (feet)	Connection	Quantity Included	Without Light	
	Connector	Cord					
	MINI, 3-pin	Flying leads	4 (13.1)	Solenoid	1	2239H77	
	M12, 5-pin			Sensing Switch	1		
	MINI, 3-pin	Flying leads	10 (32.8)	Solenoid	1	2240H77	
	M12, 5-pin			Sensing Switch	1		
Prewired Connectors for Pressure Controlled Valves	Cable					Model Number	
	End 1	End 2	Connection	Length meters (feet)	Cord Diameter mm	Quantity Included	Without Light
	Connector	Cord					
	M12, 5-pin	Flying Leads	Sensing Switch	4 (13.1)	6	1	2241H77
				10 (32.8)	10	1	2242H77

* Redundant valves require two Connector Kits or two Pre-wired Connectors.

Solenoid Connector Pinout	Sensing Switch Connector Pinout
MINI, 3-pin	M12, 5-pin
<p>1 - Green/Yellow (Ground) 2 - Blue 3 - Brown</p>	<p>Valve Basic Size 3/4 & 1-1/4</p> <p>1 - Brown 2 - White 3 - Blue 4 - Black 5 - Gray Current/Voltage Max. 2.5 A / 120 V AC</p> <p>Integrated Double-Pole Single-Throw Switch (DPST) Switch States Contact conditions during switch travel (0 to 6 mm).</p> <p>NC - Normally Closed NO - Normally Open</p> <p>The DPST switch is actuated whenever the valve is not in the normal home position.</p>

EXHAUST SILENCERS

Silencers For Pacer Style Pilot	Port Size	Thread Type	Model Number		Flow Avg. C _v	Pressure Range psig (bar)
			R Thread	NPT Thread		
	1/8	Male	D5500A1003	5500A1003	1.2	0-290 (0-20) maximum

SOLENOID OPTIONS (PACER Style)

Indicator Light Kits	Valve Model	Model Number	
		24 volts DC	110-120 volts AC 50-60 Hz
	Solenoid Pilot Valves	862K87-W	862K87-Z

Manual Override Kits	Flush Button		Extended Button		Extended Button with Palm	
	Locking Type	Kit Number	Locking Type	Kit Number	Locking Type	Kit Number
	Non-Locking	790K87	Non-Locking	791K87	Non-Locking	984H87
	Locking	792K87				
	Each of the buttons in the override kits is made of metal and is spring-returned. The locking type button, however, can be kept in the actuated position by turning the slot in the top of the button with a screwdriver.					



CAUTIONS, WARNINGS And STANDARD WARRANTY



ROSS OPERATING VALVE, ROSS CONTROLS®, ROSS DECCO®, and AUTOMATIC VALVE INDUSTRIAL, collectively the "ROSS Group".

PRE-INSTALLATION or SERVICE

1. Before servicing a valve or other pneumatic component, be sure all sources of energy are turned off, the entire pneumatic system is shut down and exhausted, and all power sources are locked out (ref: OSHA 1910.147, EN 1037).
2. All ROSS Group Products, including service kits and parts, should be installed and/or serviced only by persons having training and experience with pneumatic equipment. Because any product can be tampered with and/or need servicing after installation, persons responsible for the safety of others or the care of equipment must check ROSS Group Products on a regular basis and perform all necessary maintenance to ensure safe operating conditions.
3. All applicable instructions should be read and complied with before using any fluid power system to prevent harm to persons or equipment. In addition, overhauled or serviced valves must be functionally tested prior to installation and use. If you have any questions, call your nearest ROSS Group location.
4. Each ROSS Group Product should be used within its specification limits. In addition, use only ROSS Group components to repair ROSS Group Products.

WARNINGS:

Failure to follow these instructions can result in personal injury and/or property damage.

FILTRATION and LUBRICATION

1. Dirt, scale, moisture, etc., are present in virtually every air system. Although some valves are more tolerant of these contaminants than others, best performance will be realized if a filter is installed to clean the air supply, thus preventing contaminants from interfering with the proper performance of the equipment. The ROSS Group recommends a filter with a 5-micron rating for normal applications.
2. All standard ROSS Group filters and lubricators with polycarbonate plastic bowls are designed for compressed air applications only. Use the metal bowl guard, where provided, to minimize danger from high pressure fragmentation in the event of bowl failure. Do not expose these products to certain fluids, such as alcohol or liquefied petroleum gas, as they can cause bowls to rupture, creating a combustible condition and hazardous leakage. Immediately replace crazed, cracked, or deteriorated bowls.
3. Only use lubricants which are compatible with materials used in the valves and other components in the system. Normally, compatible lubricants are petroleum base oils with oxidation inhibitors, an aniline point between 180°F (82°C) and 220°F (104°C), and an ISO 32, or lighter, viscosity. Avoid oils with

phosphate type additives which can harm polyurethane components, potentially leading to valve failure which risks personal injury, and/or damage to property.

WARNINGS:

Failure to follow these instructions can result in personal injury and/or property damage.

AVOID INTAKE/EXHAUST RESTRICTION

1. Do not restrict air flow in the supply line. To do so could reduce the pressure of the supply air below minimum requirements for the valve and thereby causing erratic action.
2. Do not restrict a valve's exhaust port as this can adversely affect its operation. Exhaust silencers must be resistant to clogging and must have flow capacities at least as great as the exhaust capacities of the valves. Contamination of the silencer can result in reduced flow and increased back pressure.

WARNINGS: *Failure to follow these instructions can result in personal injury and/or property damage.*

SAFETY APPLICATIONS

1. Mechanical Power Presses and other potentially hazardous machinery using a pneumatically controlled clutch and brake mechanism must use a press control double valve with a monitoring device. A double valve without a self-contained monitoring device should be used only in conjunction with a control system which assures monitoring of the valve. All double valve installations involving hazardous applications should incorporate a monitoring system which inhibits further operation of the valve and machine in the event of a failure within the valve mechanism.
2. Safe Exhaust (dump) valves without a self-contained monitoring device should be used only in conjunction with a control system which assures monitoring of the valve. All Safe Exhaust valve installations should incorporate a monitoring system which inhibits further operation of the valve and machine in the event of a failure within the valve mechanism.
3. Per specifications and regulations, the ROSS L-O-X® and L-O-X® with EEZ-ON®, N06 and N16 Series operation products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

WARNINGS:

Failure to follow these instructions can result in personal injury and/or property damage.

STANDARD WARRANTY

All products sold by the ROSS Group are warranted for a one-year period [with the exception of Filters, Regulators and Lubricators ("FRLs") which are warranted for a period of seven (7) years] from the date of purchase. All products are, during their respective warranty periods, warranted to be free of defects in material and workmanship. The ROSS Group's obligation under this warranty is limited to repair, replacement or refund of the purchase price paid for products which the ROSS Group has determined, in its sole discretion, are defective. All warranties become void if a product has been subject to misuse, misapplication, improper maintenance, modification or tampering. Products for which warranty protection is sought must be returned to the ROSS Group freight prepaid.

THE WARRANTY EXPRESSED ABOVE IS IN LIEU OF AND EXCLUSIVE OF ALL OTHER WARRANTIES AND THE ROSS GROUP EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES EITHER EXPRESSED OR IMPLIED WITH RESPECT TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THE ROSS GROUP MAKES NO WARRANTY WITH RESPECT TO ITS PRODUCTS MEETING THE PROVISIONS OF ANY GOVERNMENTAL OCCUPATIONAL SAFETY AND/OR HEALTH LAWS OR REGULATIONS. IN NO EVENT IS THE ROSS GROUP LIABLE TO PURCHASER, USER, THEIR EMPLOYEES OR OTHERS FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM A BREACH OF THE WARRANTY DESCRIBED ABOVE OR THE USE OR MISUSE OF THE PRODUCTS. NO STATEMENT OF ANY REPRESENTATIVE OR EMPLOYEE OF THE ROSS GROUP MAY EXTEND THE LIABILITY OF THE ROSS GROUP AS SET FORTH HEREIN.





AMERICAS	ROSS CONTROLS	USA	Tel: +1-248-764-1800	www.rosscontrols.com
	ROSS CONTROLS CANADA Ltd.	Canada	Tel: +1-416-251-7677	www.rosscanada.com
	ROSS DO BRASIL EIRELI	Brazil	Tel: +55-11-4335-2200	www.rosscontrols.com.br
EUROPE	ROSS EUROPA GmbH	Germany	Tel: +49 (0)6103-7597-100	www.rosseuropa.com
	ROSS FRANCE SAS	France	Tel: +33-(0)1-49-45-65-65	www.rossfrance.com
	ROSS PNEUMATROL Ltd.	United Kingdom	Tel: +44 (0)1254 872277	www.rossuk.co.uk
ASIA & PACIFIC	ROSS CONTROLS INDIA Pvt. Ltd.	India	Tel: +91-44-2624-9040	www.rosscontrolsindia.com
	ROSS CONTROLS (CHINA) Ltd.	China	Tel: +86-21-6915-7961	www.rosscontrolschina.com
	ROSS ASIA K.K.	Japan	Tel: +81-42-778-7251	www.rossasia.co.jp
	AUTOMATIC VALVE INDUSTRIAL LLC	USA	Tel: +1-248-474-6700	www.automaticvalve.com
	ROSS DECCO COMPANY	USA	Tel: +1-248-764-1800	www.rossdecco.com
	ROSS PNEUMATROL Ltd.	United Kingdom	Tel: +44 (0)1254 872277	www.pneumatrol.com
	manufactIS GmbH	Germany	Tel: +49 (0)2013-16843-0	www.manufactis.net

Full-Service Global Locations

There are ROSS Distributors Throughout the World

To meet your requirements across the globe, ROSS distributors are located throughout the world. Through ROSS or its distributors, guidance is available for the selection of ROSS products, both for those using fluid power components for the first time and those designing complex systems.

Other literature is available for engineering, maintenance, and service requirements.

If you need products or specifications not shown in this catalog, please visit ROSS' website, contact ROSS or your ROSS distributor. The ROSS Support Team will be happy to assist you in selecting the best product for your application.

For a current list of countries and local distributors, visit ROSS' at www.rosscontrols.com.